

Single-lever tub mixer with stand pipe for freestanding installation with hand shower set - Dark Chrome

SERIES SPECIFIC

25 863 661




- Spout: Round aerated stream
 - Water flow rate limited to max. 5.2 gpm
 - Hand-held shower: COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
 - Baton hand shower with descaling system
 - Swiveling spout 360°
 - 11-1/8" Projection
 - Hand shower bracket
 - Integrated diverter
 - Total height 40-5/8" - 43-3/8"
 - Lower body height 22-1/4" - 25"
 - Height to aerator/spout outlet 35-3/8" - 38-1/8"
 - Flanges Ø 5-3/8"
 - Metal shower hose 49-1/4" with anti-twist device
- NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)
- Internal backflow preventer.


	Dark Chrome	25 863 661-19
	Chrome	25 863 661-00
	Brushed Platinum	25 863 661-06
	Light gold	25 863 661-26
	Brushed Light Gold	25 863 661-27
	Brushed Durabrass (23kt Gold)	25 863 661-28
	Matte Black	25 863 661-33
	Brushed Bronze	25 863 661-42
	Brushed Champagne (22kt Gold)	25 863 661-46
	Champagne (22kt Gold)	25 863 661-47
	Brushed Chrome	25 863 661-93
	Brushed Dark Platinum	25 863 661-99

Single-lever tub mixer with stand pipe for freestanding installation with hand shower set - Dark Chrome

SERIES SPECIFIC

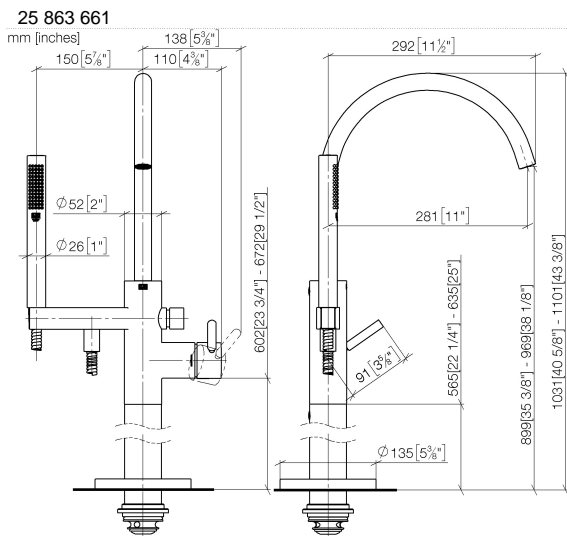

Flow rate chart

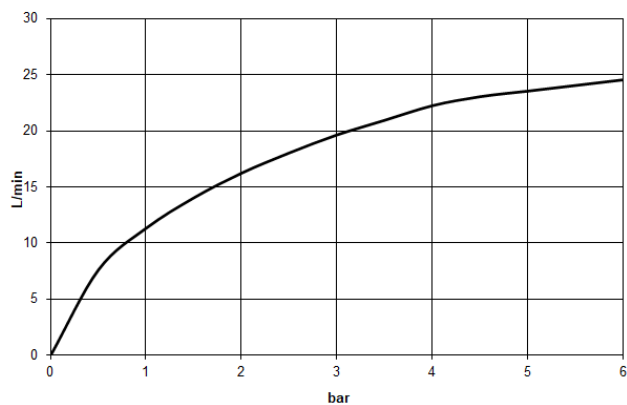

Codes & Standards

ASME A112.18.1

California Energy
Commission
(CEC)

cUPC



Single-lever tub mixer with stand pipe for freestanding installation with hand shower set - Dark Chrome

SERIES SPECIFIC

25 863 661

Certificates and sustainability

IAPMO_4976

Single-lever tub mixer with stand pipe for freestanding installation with hand shower set - Dark Chrome

SERIES SPECIFIC

25 863 661

Parts for other
finishes can be found
here: [Chrome](#)

