

## IMO Three-hole single-lever tub mixer for deck-mounted tub installation - Brushed Dark Platinum

IMO








27 412 670



- 8-7/8" Projection
- Spout: Cascade
- Water flow rate limited to max. 5.1 gpm
- Hand-held shower: COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
- Hand shower set with anti-scale technology
- Integrated diverter
- Total height 4-3/8"
- Height to aerator/spout outlet 5-3/8"
- Spout hole diameter 1-1/4"
- Single-lever mixer hole diameter 1-3/8"
- Hole diameter for hand shower set 1-1/4"
- Flange for mixer 2-3/8" x 2-3/8"
- 2-3/8" x 2-3/8" flange for spout
- Hand shower set with flange 2-3/8" x 2-3/8"
- Metal shower hose 88-5/8" with anti-twist device

NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)

Internal backflow preventer.


|   |                       |               |
|---|-----------------------|---------------|
|  | Brushed Dark Platinum | 27 412 670-99 |
|  | Chrome                | 27 412 670-00 |
|  | Brushed Platinum      | 27 412 670-06 |
|  | Dark Chrome           | 27 412 670-19 |
|  | Brushed Light Gold    | 27 412 670-27 |
|  | Matte Black           | 27 412 670-33 |
|  | Brushed Chrome        | 27 412 670-93 |

## IMO Three-hole single-lever tub mixer for deck-mounted tub installation - Brushed Dark Platinum


IMO

27 412 670

mm [inches]

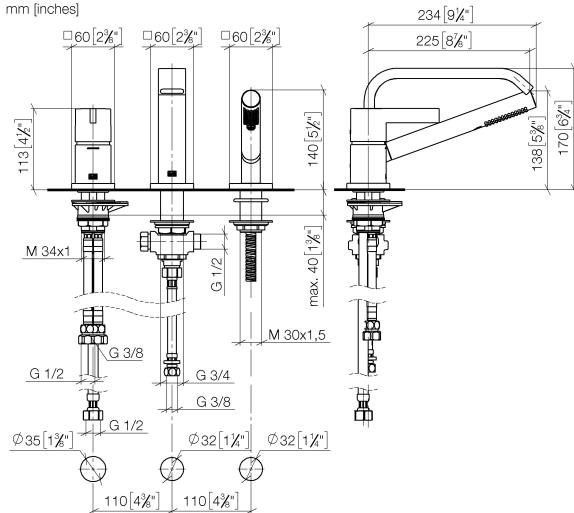

### Flow rate chart

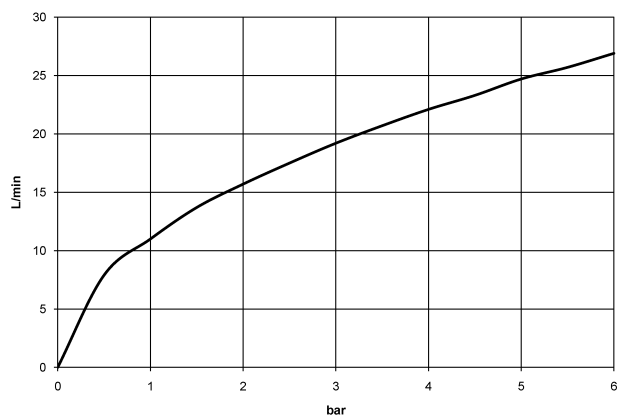

### Codes & Standards

California Energy  
Commission  
(CEC)

EN 1717



## IMO Three-hole single-lever tub mixer for deck-mounted tub installation - Brushed Dark Platinum

---

IMO

27 412 670

Certificates and sustainability

---

Belgaqua\_24-008-2

## IMO Three-hole single-lever tub mixer for deck-mounted tub installation - Brushed Dark Platinum

IMO

27 412 670

Parts for other  
finishes can be found  
here: [Chrome](#)

