

MEM Three-hole single-lever tub mixer for deck-mounted tub installation - Dark Chrome

27 412 782



- 8-5/8" Projection
- Spout: Rectangular aerator
- Water flow rate limited to max. 5.4 gpm
- Hand-held shower: COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
- Hand shower set with anti-scale technology
- Integrated diverter
- Total height 11-3/4"
- Height to aerator/spout outlet 6-3/4"
- Spout hole diameter 1-1/4"
- Single-lever mixer hole diameter 1-3/8"
- Hole diameter for hand shower set 1-1/4"
- Flange for mixer 2-3/8" x 2-3/8"
- 2-3/8" x 2-3/8" flange for spout
- Hand shower set with flange 2-3/8" x 2-3/8"
- Metal shower hose 88-5/8" with anti-twist device


NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)

Internal backflow preventer.


| | | |
|---|--------------------------------|---------------|
|  | Dark Chrome | 27 412 782-19 |
|  | Chrome | 27 412 782-00 |
|  | Brushed Platinum | 27 412 782-06 |
|  | Platinum | 27 412 782-08 |
|  | Brushed Durabronze (23kt Gold) | 27 412 782-28 |
|  | Brushed Champagne (22kt Gold) | 27 412 782-46 |
|  | Champagne (22kt Gold) | 27 412 782-47 |
|  | Brushed Dark Platinum | 27 412 782-99 |

MEM Three-hole single-lever tub mixer for deck-mounted tub installation - Dark Chrome

27 412 782
mm [inches]

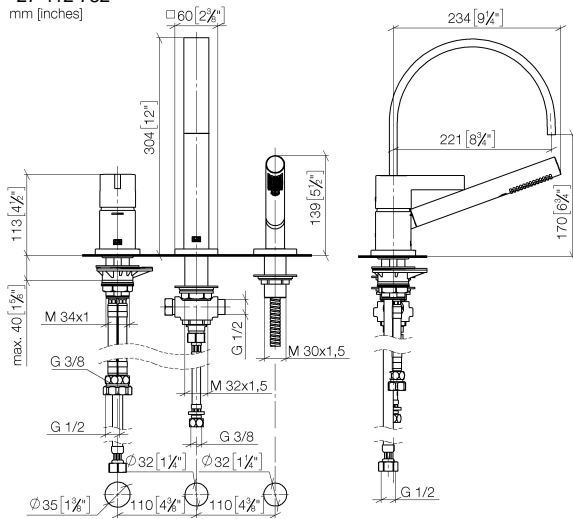

Flow rate chart

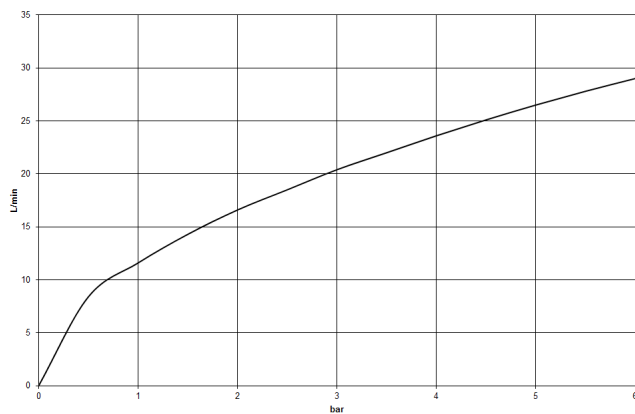

Codes & Standards

ASME A112.18.1

ASME
A112.18.1/CSA
B125.1

California Energy
Commission
(CEC)

cUPC

EN 1717



MEM Three-hole single-lever tub mixer for deck-mounted tub installation - Dark
Chrome

27 412 782
Certificates

IAPMO_4976 Belgaqua_24-008-2

MEM Three-hole single-lever tub mixer for deck-mounted tub installation - Dark Chrome

27 412 782

Parts for other
finishes can be found
here: [Chrome](#)

