

Hand shower set with integrated wall bracket FlowReduce - Brushed Light Gold

27 802 660 Product version from 10/1/2023



- COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
 - Descaling system
 - 3/8" Shower outlet
 - Metal shower hose 49-1/4" with anti-twist device
 - Flange diameter 2-3/8"
 - 1/2" connection
 - This product reduces water consumption by 28% (compared to requirements of EPAct '92)
 - This product contributes to meeting the requirements of the LEED® Green Building Rating
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Internal backflow preventer.


	Brushed Light Gold	27 802 660-27 0010
	Chrome	27 802 660-00 0010
	Brushed Platinum	27 802 660-06 0010
	Platinum	27 802 660-08 0010
	Dark Chrome	27 802 660-19 0010
	Light gold	27 802 660-26 0010
	Brushed Durabrass (23kt Gold)	27 802 660-28 0010
	Matte Black	27 802 660-33 0010
	Brushed Bronze	27 802 660-42 0010
	Brushed Champagne (22kt Gold)	27 802 660-46 0010
	Champagne (22kt Gold)	27 802 660-47 0010
	Brushed Chrome	27 802 660-93 0010
	Brushed Dark Platinum	27 802 660-99 0010




Hand shower set with integrated wall bracket FlowReduce - Brushed Light Gold

27 802 660 Product version from 10/1/2023

mm [inches]

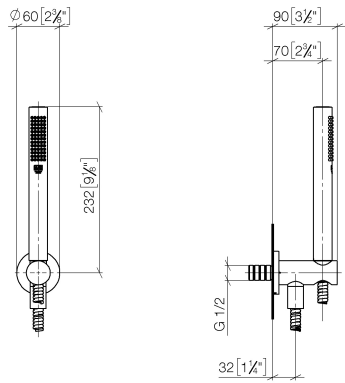

Flow rate chart

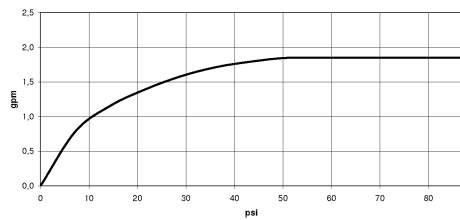

Codes & Standards

ASME
A112.18.1/CSA
B125.1

California Energy
Commission
(CEC)

DIN 4109

ISO 3822

Ü-Zeichen



Hand shower set with integrated wall bracket FlowReduce - Brushed Light Gold

27 802 660 Product version from 10/1/2023

Certificates

LGA_29

Hand shower set with integrated wall bracket FlowReduce - Brushed Light Gold

27 802 660 Product version from 10/1/2023

Parts for other
finishes can be found
here: [Chrome](#)



Spare parts list

Number	Item Number	Designation	Number of units	Lead time
1	90 12 11 140 41-27	shower	1	30
2	28 490 660-27	Wall elbow with integrated wall bracket - Brushed Light Gold	1	30
3	90 30 02 072 00-27	Metal shower hose 1/2" x 3/8" x 49-1/4" - Brushed Light Gold	1	30
4	90 14 20 026 00 90	seal	1	2