

TARA Hand shower set with individual flanges FlowReduce - Matte Black

TARA

27 802 892 Product version from 4/1/2024



- COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
  - Descaling system
  - 1/2" Shower outlet
  - Wall elbow with flange Ø 2-1/8"
  - Wall bracket with flange Ø 2-1/8"
  - Metal shower hose 49-1/4" with anti-twist device
  - 1/2" wall elbow
  - This product reduces water consumption by 28% (compared to requirements of EPAct '92)
  - This product contributes to meeting the requirements of the LEED® Green Building Rating
  - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Internal backflow preventer.**

Internal backflow preventer.

	Matte Black	27 802 892-33 0010
	Chrome	27 802 892-00 0010
	Brushed Platinum	27 802 892-06 0010
	Platinum	27 802 892-08 0010
	Dark Chrome	27 802 892-19 0010
	Brushed Durabrass (23kt Gold)	27 802 892-28 0010
	Brushed Bronze	27 802 892-42 0010
	Brushed Champagne (22kt Gold)	27 802 892-46 0010
	Champagne (22kt Gold)	27 802 892-47 0010
	Brushed Chrome	27 802 892-93 0010
	Brushed Dark Platinum	27 802 892-99 0010


Required article

Rough-in adapter -

35 080 970-90  
0010



mm [inches]

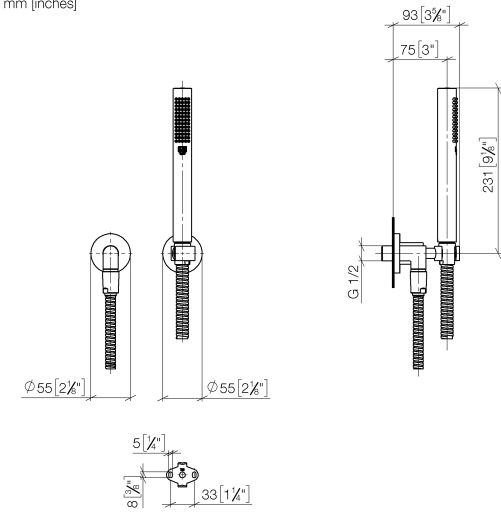


Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC	DIN 4109
ISO 3822	Ü-Zeichen		

Certificates and sustainability

LGA_29	IAPMO_4976
--------	------------

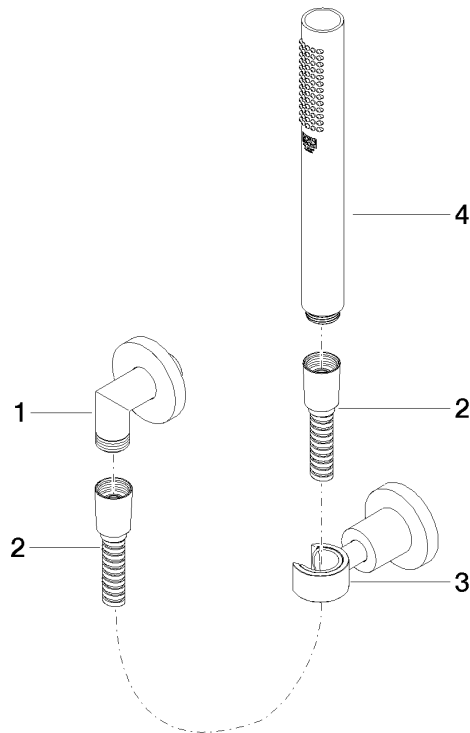

## Spare parts list

Number	Item Number	Designation	Number of units	Lead time
2	28 104 970-33	Metal shower hose 1/2" x 1/2" x 49-1/4" - Matte Black	1.00	2
1	28 450 892-33	connection	1.00	60
3	28 050 892-33	TARA Wall bracket - Matte Black	1.00	10
4	90 12 11 140 41-33	shower	1.00	30