

Hand shower set with integrated wall bracket FlowReduce - Platinum

SERIES SPECIFIC

27 802 970 Product version from 6/1/2024



- COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
 - Descaling system
 - 3/8" Shower outlet
 - Metal shower hose 49-1/4" with anti-twist device
 - Flange 2-3/8" x 2-3/8"
 - 1/2" connection
 - This product reduces water consumption by 28% (compared to requirements of EPA '92)
 - This product contributes to meeting the requirements of the LEED® Green Building Rating
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Internal backflow preventer.**

Internal backflow preventer.

| | | |
|---|-------------------------------|--------------------|
|  | Platinum | 27 802 970-08 0010 |
|  | Chrome | 27 802 970-00 0010 |
|  | Brushed Platinum | 27 802 970-06 0010 |
|  | Dark Chrome | 27 802 970-19 0010 |
|  | Brushed Light Gold | 27 802 970-27 0010 |
|  | Brushed Durabrass (23kt Gold) | 27 802 970-28 0010 |
|  | Matte Black | 27 802 970-33 0010 |
|  | Brushed Champagne (22kt Gold) | 27 802 970-46 0010 |
|  | Champagne (22kt Gold) | 27 802 970-47 0010 |
|  | Brushed Chrome | 27 802 970-93 0010 |
|  | Brushed Dark Platinum | 27 802 970-99 0010 |


Required article

Rough-in adapter -

35 080 970-90
0010



mm [inches]

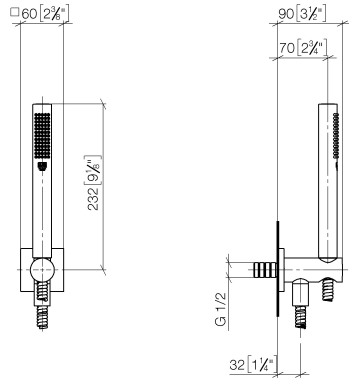

Codes & Standards

| | | | |
|--|----------|----------|-----------|
| California Energy Commission (CEC) | DIN 4109 | ISO 3822 | Ü-Zeichen |
|--|----------|----------|-----------|

Certificates and sustainability

LGA_29



Spare parts list

| Number | Item Number | Designation | Number of units | Lead time |
|--------|--------------------|--|-----------------|-----------|
| 2 | 28 490 970-08 | Wall elbow with integrated wall bracket - Platinum | 1.00 | 40 |
| 3 | 90 30 02 072 00-08 | Metal shower hose 1/2" x 3/8" x 49-1/4" - Platinum | 1.00 | 40 |
| 4 | 90 14 20 026 00 90 | seal | 1.00 | 2 |
| 1 | 90 12 11 140 41-08 | shower | 1.00 | 40 |