

# Hand shower set with integrated wall bracket FlowReduce - Matte Black

27 802 970    Product version from 6/1/2024



- COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
  - Descaling system
  - 3/8" Shower outlet
  - Metal shower hose 49-1/4" with anti-twist device
  - Flange 2-3/8" x 2-3/8"
  - 1/2" connection
  - This product reduces water consumption by 28% (compared to requirements of EPAct '92)
  - This product contributes to meeting the requirements of the LEED® Green Building Rating
  - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Internal backflow preventer.**

Internal backflow preventer.

	Matte Black	27 802 970-33 0010
	Chrome	27 802 970-00 0010
	Brushed Platinum	27 802 970-06 0010
	Platinum	27 802 970-08 0010
	Dark Chrome	27 802 970-19 0010
	Brushed Light Gold	27 802 970-27 0010
	Brushed Durabrass (23kt Gold)	27 802 970-28 0010
	Brushed Champagne (22kt Gold)	27 802 970-46 0010
	Champagne (22kt Gold)	27 802 970-47 0010
	Brushed Chrome	27 802 970-93 0010
	Brushed Dark Platinum	27 802 970-99 0010

## Required article


	Rough-in adapter -	35 080 970-90 0010
---	--------------------	--------------------



# Hand shower set with integrated wall bracket FlowReduce - Matte Black

27 802 970    Product version from 6/1/2024

mm [inches]

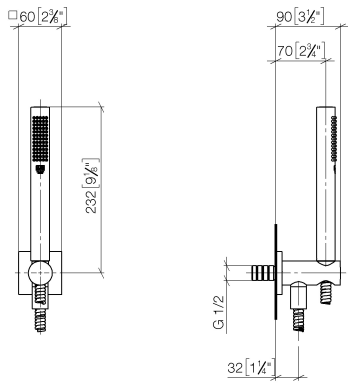

## Codes & Standards

ASME A112.18.1/CSA B125.1 Ü-Zeichen	California Energy Commission (CEC)	DIN 4109	ISO 3822
--	--	----------	----------

## Certificates

LGA\_29

# Hand shower set with integrated wall bracket FlowReduce - Matte Black

27 802 970    Product version from 6/1/2024



## Spare parts list

Number	Item Number	Designation	Number of units	Lead time
1	90 12 11 140 41-33	shower	1	30
2	28 490 970-33	Wall elbow with integrated wall bracket - Matte Black	1	30
3	90 30 02 072 00-33	Metal shower hose 1/2" x 3/8" x 49-1/4" - Matte Black	1	30
4	90 14 20 026 00 90	seal	1	2