



Hand shower set with integrated wall bracket FlowReduce - Brushed Dark Platinum

27 802 970 Product version from 6/1/2024



- COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
 - Descaling system
 - 3/8" Shower outlet
 - Metal shower hose 49-1/4" with anti-twist device
 - Flange 2-3/8" x 2-3/8"
 - 1/2" connection
 - This product reduces water consumption by 28% (compared to requirements of EPA Act '92)
 - This product contributes to meeting the requirements of the LEED® Green Building Rating
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Internal backflow preventer.**

Internal backflow preventer.

	Brushed Dark Platinum	27 802 970-99 0010
	Chrome	27 802 970-00 0010
	Brushed Platinum	27 802 970-06 0010
	Platinum	27 802 970-08 0010
	Dark Chrome	27 802 970-19 0010
	Brushed Light Gold	27 802 970-27 0010
	Brushed Durabrass (23kt Gold)	27 802 970-28 0010
	Matte Black	27 802 970-33 0010
	Brushed Champagne (22kt Gold)	27 802 970-46 0010
	Champagne (22kt Gold)	27 802 970-47 0010
	Brushed Chrome	27 802 970-93 0010

Required article


Rough-in adapter - 35 080 970-90 0010





Hand shower set with integrated wall bracket FlowReduce - Brushed Dark Platinum

27 802 970 Product version from 6/1/2024
mm [inches]

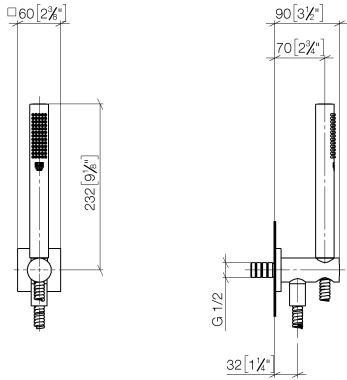

Codes & Standards

ASME A112.18.1/CSA B125.1 Ü-Zeichen	California Energy Commission (CEC)	DIN 4109	ISO 3822
--	--	----------	----------


Certificates

LGA_29

Hand shower set with integrated wall bracket FlowReduce - Brushed Dark Platinum

27 802 970

Product version from 6/1/2024

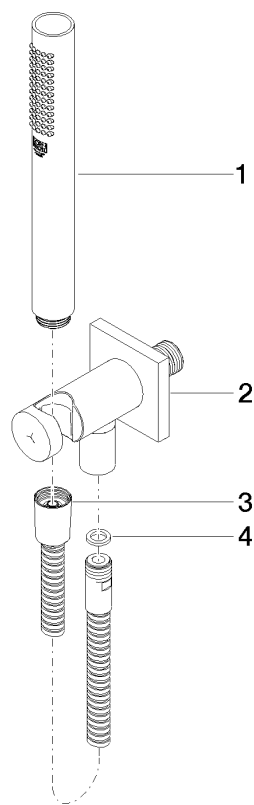

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
1	90 12 11 140 41-99	shower	1	20
2	28 490 970-99	Wall elbow with integrated wall bracket - Brushed Dark Platinum	1	20
3	90 30 02 072 00-99	Metal shower hose 1/2" x 3/8" x 49-1/4" - Brushed Dark Platinum	1	20
4	90 14 20 026 00 90	seal	1	2