



- COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
- 3/8" Shower outlet
- Metal shower hose 49-1/4" with anti-twist device
- Descaling system

Technical data:

- Wall elbow with flange Ø 2-3/8"
- Wall bracket with flange Ø 2-3/8"
- 1/2" wall elbow


Notes:

Internal backflow preventer.


Internal backflow preventer.

	Brushed Platinum	27 808 809-06 0010
	Chrome	27 808 809-00 0010
	Platinum	27 808 809-08 0010
	Dark Chrome	27 808 809-19 0010
	Brushed Durabronze (23kt Gold)	27 808 809-28 0010
	Brushed Dark Brass	27 808 809-39 0010
	Brushed Bronze	27 808 809-42 0010
	Brushed Champagne (22kt Gold)	27 808 809-46 0010
	Champagne (22kt Gold)	27 808 809-47 0010
	Brushed Dark Platinum	27 808 809-99 0010

Required article

	Rough-in adapter -	35 080 970-90 0010
---	--------------------	--------------------

mm [inches]

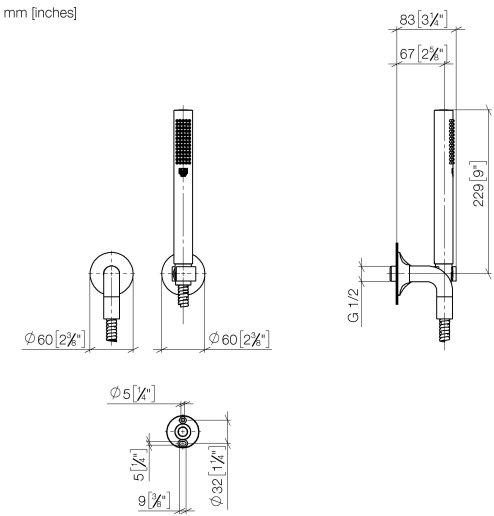


Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC	DIN 4109
ISO 3822	Ü-Zeichen		

Certificates and sustainability

LGA_29
IAPMO_4976

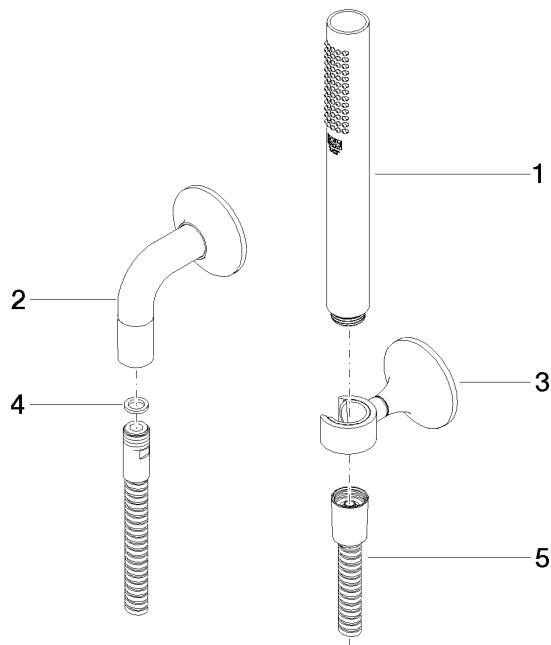

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
3	28 050 809-06	VAIA Wall bracket - Brushed Platinum	1.00	10
2	28 450 809-06	VAIA Wall elbow - Brushed Platinum	1.00	10
5	90 30 02 072 00-06	Metal shower hose 1/2" x 3/8" x 49-1/4" - Brushed Platinum	1.00	10
4	90 14 20 026 00 90	seal	1.00	2
1	90 12 11 140 41-06	shower	1.00	10