








MADISON Hand shower FlowReduce - Chrome

28 002 978



- 3-way adjustable: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, flow rate max. 1.8 gpm (at 3 bar)
- Descaling system
- Ø 3-3/4"
- 1/2" connection
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Internal backflow preventer.


| | | |
|---|-------------------------------|--------------------|
|  | Chrome | 28 002 978-00 0010 |
|  | Brushed Platinum | 28 002 978-06 0010 |
|  | Platinum | 28 002 978-08 0010 |
|  | Durabrass (23kt Gold) | 28 002 978-09 0010 |
|  | Brushed Durabrass (23kt Gold) | 28 002 978-28 0010 |
|  | Brushed Chrome | 28 002 978-93 0010 |
|  | Brushed Dark Platinum | 28 002 978-99 0010 |



MADISON Hand shower FlowReduce - Chrome

28 002 978

mm [inches]



Flow rate chart



Codes & Standards

| | | | |
|----------------|------------------------------------|-------------|----------|
| ASME A112.18.1 | California Energy Commission (CEC) | cUPC | DIN 4109 |
| ISO 3822 | Ü-Zeichen | Water Sense | |



MADISON Hand shower FlowReduce - Chrome


28 002 978

Certificates

LGA_18 IAPMO_4976 (

MADISON Hand shower FlowReduce - Chrome

28 002 978

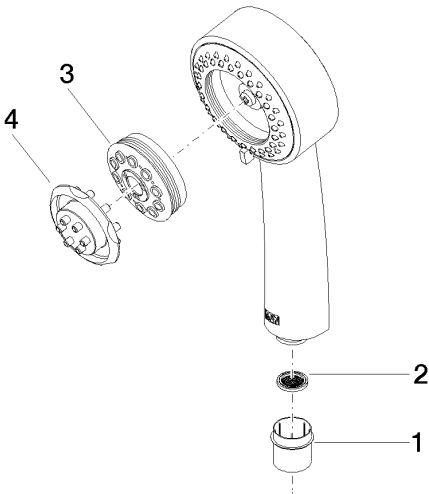

Spare parts list

| Number | Item Number | Designation | Number of units | Lead time |
|--------|--------------------|-------------|-----------------|-----------|
| 1 | 09 21 02 115 90 | cap | 1 | 2 |
| 2 | 09 23 01 039 90 | sieve | 1 | 2 |
| 3 | 04 12 11 071 00 90 | shower | 1 | 2 |
| 4 | 09 30 09 022 90 | key | 1 | 2 |