


Hand shower - Dark Chrome

28 014 979



- 3 individual sprays (standard, soft, massage) + 2 combinations (standard+soft, soft+massage)
- Descaling system
- Ø 3-7/8"
- 1/2" connection
- Water flow rate limited to max. 1.8 gpm
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Internal backflow preventer.


	Dark Chrome	28 014 979-19 0010
<hr/>		
	Light gold	28 014 979-26 0010
<hr/>		
	Brushed Light Gold	28 014 979-27 0010
<hr/>		
	Cyprum	28 014 979-49 0010
<hr/>		



Hand shower - Dark Chrome

28 014 979

mm [inches]

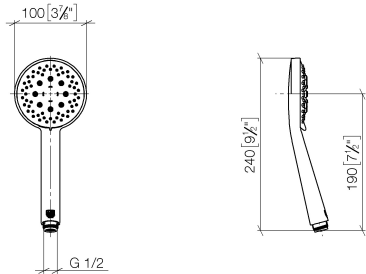

Codes & Standards

ASME A112.18.1	ASME A112.18.1/CSA B125.1	California Energy Commission (CEC)	cUPC
EN 1112	Scottish Water Byelaws	UK Water Supply Regulations	

Certificates

DVGW_DW- 6517DN0	WRAS_2210	IAPMO_4976 (
---------------------	-----------	--------------	--

Hand shower - Dark Chrome

28 014 979

