

Body spray without diverter FlowReduce - Brushed Light Gold

SERIES SPECIFIC


28 518 782



- Ø 2-1/8"
- swivels 25°
- Stream: Rain
- Descaling system
- Flange 2-3/8" x 2-3/8"
- 1/2" connection
- Water flow rate limited to max. 1.3 gpm
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


	Brushed Light Gold	28 518 782-27
	Chrome	28 518 782-00
	Brushed Platinum	28 518 782-06
	Platinum	28 518 782-08
	Dark Chrome	28 518 782-19
	Brushed Durabrass (23kt Gold)	28 518 782-28
	Matte Black	28 518 782-33
	Brushed Champagne (22kt Gold)	28 518 782-46
	Champagne (22kt Gold)	28 518 782-47
	Brushed Chrome	28 518 782-93
	Brushed Dark Platinum	28 518 782-99

Required article


	Rough-in adapter -	35 080 970-90 0010
---	--------------------	--------------------

28 518 782


mm [inches]



Flow rate chart

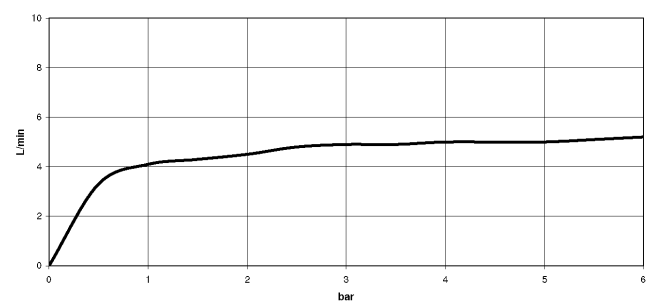

Trajectory length diagram

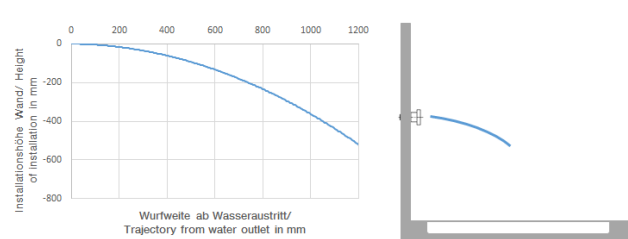

Codes & Standards

California Energy Commission (CEC)	DIN 4109	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



Body spray without diverter FlowReduce - Brushed Light Gold

SERIES SPECIFIC

28 518 782

Certificates and sustainability

LGA\_38

WRAS\_240602

28 518 782

