




Two-way diverter for deck-mounted tub installation - Brushed Light Gold

29 140 670 Product version from 6/30/2015




- Integrated diverter
- 1-1/4" hole diameter
- Flange 2-3/8" x 2-3/8"
- 1/2" connection
- Water flow rate limited to max. 17.1 gpm

	Brushed Light Gold	29 140 670-27
	Chrome	29 140 670-00
	Brushed Platinum	29 140 670-06
	Platinum	29 140 670-08
	Dark Chrome	29 140 670-19
	Brushed Durabronze (23kt Gold)	29 140 670-28
	Matte Black	29 140 670-33
	Brushed Champagne (22kt Gold)	29 140 670-46
	Champagne (22kt Gold)	29 140 670-47
	Brushed Chrome	29 140 670-93
	Brushed Dark Platinum	29 140 670-99

Two-way diverter for deck-mounted tub installation - Brushed Light Gold

29 140 670 Product version from 6/30/2015

mm [inches]

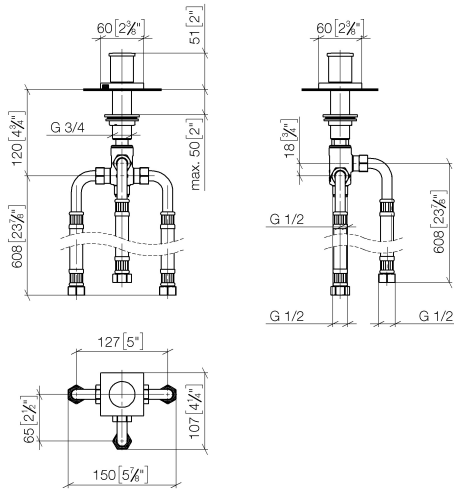

Flow rate chart



Codes & Standards

ASME
A112.18.1/CSA
B125.1

California Energy
Commission
(CEC)

DIN 4109

ISO 3822

Ü-Zeichen



Two-way diverter for deck-mounted tub installation - Brushed Light Gold

29 140 670 Product version from 6/30/2015


Certificates

LGA_29

Two-way diverter for deck-mounted tub installation - Brushed Light Gold

29 140 670 Product version from 6/30/2015

Parts for other
finishes can be found
here: [Chrome](#)

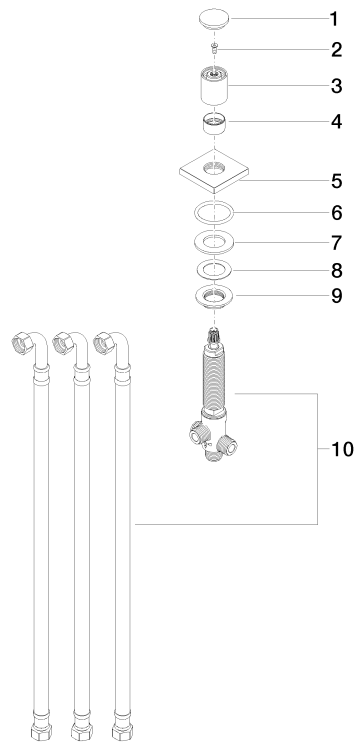

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
1	09 20 71 003-27	handle	1	60
2	90 30 30 014 00 90	screw	1	2
3	09 20 71 002-27	handle	1	60
4	09 16 01 012-27	ring	1	60
5	09 27 67 006-27	rosette	1	60
6	90 14 10 043 00 90	seal	1	2
7	09 14 05 014 90	seal	1	2
8	09 14 40 002 90	seal	1	2
9	09 23 10 004 90	nut	1	2
10	90 17 09 051 00 90	diverter	1	2