

TARA ULTRA POT FILLER Cold water valve - Brushed Durabronze (23kt Gold) TARA ULTRA

30 805 875 Product version from 10/1/2024



- 19-5/8" Projection
- Swiveling spout
- Laminar stream
- One water inlet, no mixing function
- Water flow rate limited to max. 1.5 gpm
- Two valves for on / off function
- Min. rough in depth 4-7/8"
- Max. rough in depth 3-1/8"
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


	Brushed Durabronze (23kt Gold)	30 805 875-28
	Chrome	30 805 875-00
	Brushed Platinum	30 805 875-06
	Platinum	30 805 875-08
	Durabronze (23kt Gold)	30 805 875-09
	Dark Chrome	30 805 875-19
	Brushed Bronze	30 805 875-42
	Brushed Champagne (22kt Gold)	30 805 875-46
	Champagne (22kt Gold)	30 805 875-47
	Brushed Chrome	30 805 875-93
	Brushed Dark Platinum	30 805 875-99

Required article




- POT FILLER Rough-in wall elbow - 35 087 970-90 0010**
- Max. rough in depth 4-7/8"
 - Min. rough in depth 3-1/8"

30 805 875 Product version from 10/1/2024

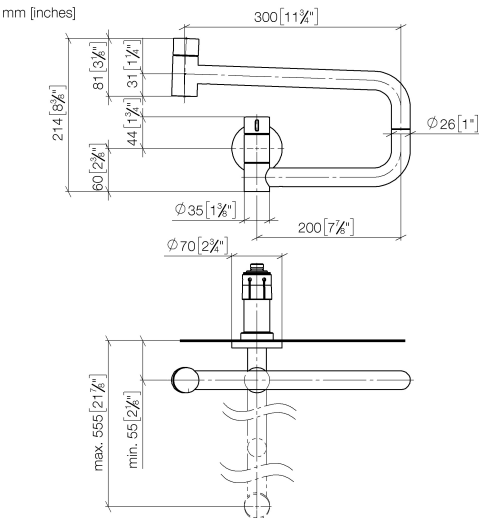

Flow rate chart

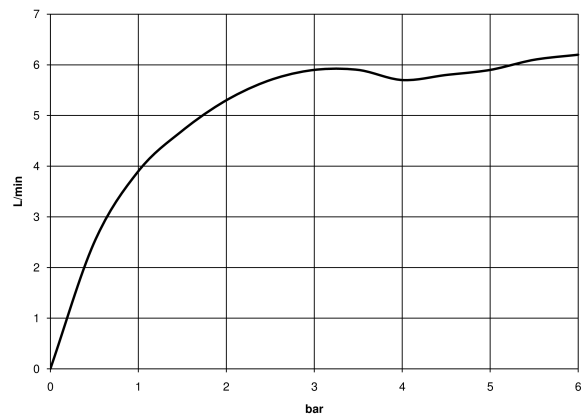

Codes & Standards

California Energy Commission (CEC)	DIN 4109	ISO 3822	NSF372
NSF61	Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen



TARA ULTRA POT FILLER Cold water valve - Brushed Durabross (23kt Gold)

TARA ULTRA

30 805 875 Product version from 10/1/2024

Certificates and sustainability

LGA_29

IAPMO_N-4

IAPMO_6

WRAS_240702



Spare parts list

Number	Item Number	Designation	Number of units	Lead time
5	90 90 03 171 00 90	top	1.00	2
1	09 20 62 025-28	handle	1.00	20
4	09 20 62 027-28	handle	1.00	20
9	09 28 10 136 90	ring	1.00	2
2	90 90 03 146 00 90	top	1.00	2
11	09 28 10 139 90	ring	1.00	2
8	90 16 04 001 00 90	spring	1.00	2
7	90 27 87 039 00-28	rosette	1.00	20
6	90 30 01 213 00 90	connection	1.00	2
12	09 21 02 028-28	lid	1.00	20
10	09 14 10 015 90	seal	2.00	2
3	90 23 01 026 11-28	aerator	1.00	20