









VAIA Wall mounted two-way diverter - Brushed Bronze

36 200 819



- Manual diverter
 - Flange diameter 2-3/8"
 - with integrated shut-off (ADA)
- Does not allow for simultaneous use of functions**
- (ADA)
- Does not allow for simultaneous use of functions

	Brushed Bronze	36 200 819-42 0010
	Chrome	36 200 819-00 0010
	Brushed Platinum	36 200 819-06 0010
	Dark Chrome	36 200 819-19 0010
	Brushed Durabrass (23kt Gold)	36 200 819-28 0010
	Brushed Dark Platinum	36 200 819-99 0010

Required article




- Wall mounted two-way diverter -** 35 202 970-90
- Min. rough in depth "
 - Max. rough in depth "
- 0010




VAIA Wall mounted two-way diverter - Brushed Bronze

36 200 819

mm [inches]



Flow rate chart

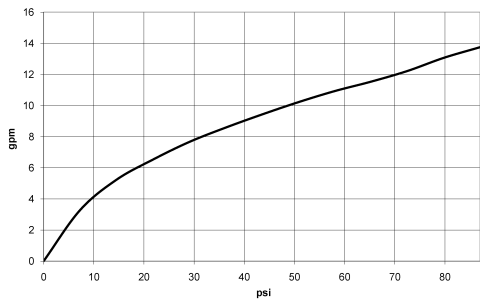

Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC
----------------	------------------------------------	------



VAIA Wall mounted two-way diverter - Brushed Bronze

36 200 819

Certificates

IAPMO_4976 (

VAIA Wall mounted two-way diverter - Brushed Bronze

36 200 819

