

## Concealed thermostat with two-way diverter - Dark Chrome

SERIES SPECIFIC

36 426 970



- Diverter with integrated volume control
  - Cover plate Ø 5-7/8"
  - Temperature control handle with safety lock at 100 °F/ 38°C
  - Max. temperature can be set on the trim
  - single flow function only
- (ADA)**

(ADA)

	Dark Chrome	36 426 970-19 0010
	Chrome	36 426 970-00 0010
	Brushed Platinum	36 426 970-06 0010
	Platinum	36 426 970-08 0010
	Light gold	36 426 970-26 0010
	Brushed Light Gold	36 426 970-27 0010
	Brushed Durabronze (23kt Gold)	36 426 970-28 0010
	Matte Black	36 426 970-33 0010
	Brushed Dark Brass	36 426 970-39 0010
	Brushed Bronze	36 426 970-42 0010
	Brushed Champagne (22kt Gold)	36 426 970-46 0010
	Champagne (22kt Gold)	36 426 970-47 0010
	Brushed Chrome	36 426 970-93 0010
	Brushed Dark Platinum	36 426 970-99 0010

### Required article



**Concealed thermostat for one- and two-way outlets -**  
 •Max. rough in depth 5-3/8"  
 •Min. rough in depth 3-1/8"

35 426 970-90 0010

### Recommended article



**xGRID Mounting bracket for drywall construction -**

12 340 970 90

### Required article



**xGRID Installation track 21.85" -**

12 360 970 90




Concealed thermostat with two-way diverter - Dark Chrome

SERIES SPECIFIC

36 426 970

mm [inches]

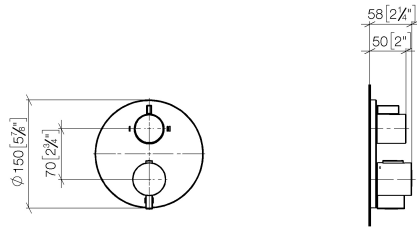

Codes & Standards

ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC
-----	----------------	------------------------------------	------

Certificates and sustainability

IAPMO\_4976 (

36 426 970

