

## Concealed thermostat with two-way diverter - Brushed Champagne (22kt Gold) SERIES SPECIFIC















36 426 970 Product version from 6/30/2022



- Diverter with integrated volume control
- Cover plate Ø 5-7/8"
- Temperature control handle with safety lock at 100 °F/ 38°C
- Max. temperature can be set on the trim
- single flow function only

(ADA)

(ADA)

	Brushed Champagne (22kt Gold)	36 426 970-46 0010
	Chrome	36 426 970-00 0010
	Brushed Platinum	36 426 970-06 0010
	Platinum	36 426 970-08 0010
	Dark Chrome	36 426 970-19 0010
	Light gold	36 426 970-26 0010
	Brushed Light Gold	36 426 970-27 0010
	Brushed Durabronze (23kt Gold)	36 426 970-28 0010
	Matte Black	36 426 970-33 0010
	Brushed Dark Brass	36 426 970-39 0010
	Brushed Bronze	36 426 970-42 0010
	Champagne (22kt Gold)	36 426 970-47 0010
	Brushed Chrome	36 426 970-93 0010
	Brushed Dark Platinum	36 426 970-99 0010

### Required article



#### Concealed thermostat for one- and two-way outlets -

- Max. rough in depth 5-3/8"
- Min. rough in depth 3-1/8"

35 426 970-90 0010

### Recommended article



#### xGRID Mounting bracket for drywall construction -

12 340 970 90

### Required article



#### xGRID Installation track 21.85" -


12 360 970 90



Concealed thermostat with two-way diverter - Brushed Champagne (22kt Gold) SERIES SPECIFIC

36 426 970 Product version from 6/30/2022

mm [inches]

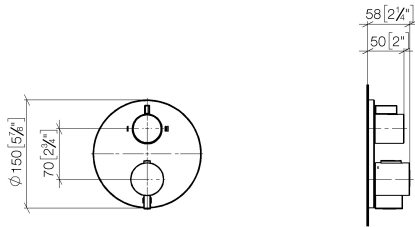

Codes & Standards

ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC
-----	----------------	------------------------------------	------

Certificates and sustainability

IAPMO\_4976 (

## Concealed thermostat with two-way diverter - Brushed Champagne (22kt Gold) SERIES SPECIFIC

36 426 970 Product version from 6/30/2022

