

Concealed thermostat with three-way diverter - Brushed Bronze

SERIES SPECIFIC



36 428 970 Product version from 6/30/2022



- Diverter with integrated volume control
- Cover plate Ø 5-7/8"
- Temperature control handle with safety lock at 100 °F/ 38°C
- Max. temperature can be set on the trim
- single flow function only

(ADA)

(ADA)

	Brushed Bronze	36 428 970-42 0010
	Chrome	36 428 970-00 0010
	Brushed Platinum	36 428 970-06 0010
	Platinum	36 428 970-08 0010
	Dark Chrome	36 428 970-19 0010
	Light gold	36 428 970-26 0010
	Brushed Light Gold	36 428 970-27 0010
	Brushed Durabronze (23kt Gold)	36 428 970-28 0010
	Matte Black	36 428 970-33 0010
	Brushed Dark Brass	36 428 970-39 0010
	Brushed Champagne (22kt Gold)	36 428 970-46 0010
	Champagne (22kt Gold)	36 428 970-47 0010
	Brushed Chrome	36 428 970-93 0010
	Brushed Dark Platinum	36 428 970-99 0010

Required article



Concealed thermostat for three-way outlets -

- Min. rough in depth 3-1/8"
- Max. rough in depth 5-3/8"

35 428 970-90 0010

Recommended article



xGRID Mounting bracket for drywall construction -

12 340 970 90

Required article



xGRID Installation track 21.85" -

12 360 970 90

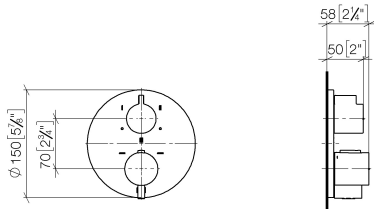


Concealed thermostat with three-way diverter - Brushed Bronze

SERIES SPECIFIC

36 428 970 Product version from 6/30/2022

mm [inches]



Codes & Standards

ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC
-----	----------------	------------------------------------	------

Certificates and sustainability

IAPMO_4976 (

