

WATER POINTS Body spray FlowReduce - Dark Chrome

36 515 979



- HORIZONTAL RAIN, flow rate max. 1.6 gpm (at 3 bar)
 - Descaling system
 - Cover plate 4-3/4" x 4-3/4"
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Additional flow restrictor (2.2 gpm) included to extend spray projection.**

Additional flow restrictor (2.2 gpm) included to extend spray projection.

| | | |
|--|--------------------------------|---------------|
| | Dark Chrome | 36 515 979-19 |
| | Chrome | 36 515 979-00 |
| | Brushed Platinum | 36 515 979-06 |
| | Platinum | 36 515 979-08 |
| | Light gold | 36 515 979-26 |
| | Brushed Light Gold | 36 515 979-27 |
| | Brushed Durabronze (23kt Gold) | 36 515 979-28 |
| | Matte Black | 36 515 979-33 |
| | Brushed Bronze | 36 515 979-42 |
| | Brushed Champagne (22kt Gold) | 36 515 979-46 |
| | Champagne (22kt Gold) | 36 515 979-47 |
| | Brushed Chrome | 36 515 979-93 |
| | Brushed Dark Platinum | 36 515 979-99 |

Required article



- WATER POINTS Adapter plate -** 12 305 970 90
- Adapter plate for mounting concealed rough parts 35 205 970 90 on the xGRID installation track.

Required article



- Rough -** 35 205 970-90 0010
- Min. rough in depth "
 - Max. rough in depth "

Recommended article



- xGRID Mounting bracket for drywall construction -** 12 340 970 90

Required article




- xGRID Installation track 21.85" -** 12 360 970 90


WATER POINTS Body spray FlowReduce - Dark Chrome

36 515 979

mm [inches]

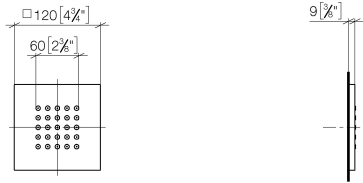

Flow rate chart

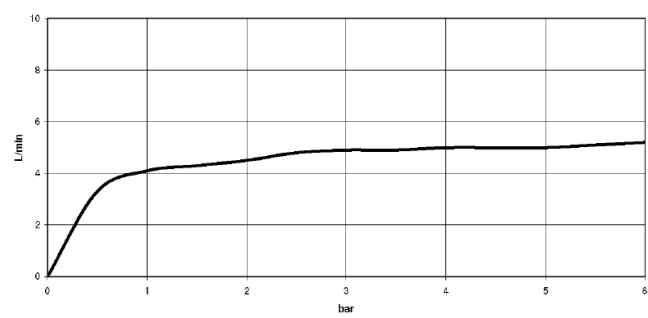

Trajectory length diagram



Codes & Standards

| | | | |
|----------------|---------------------------|------------------------------------|------|
| ASME A112.18.1 | ASME A112.18.1/CSA B125.1 | California Energy Commission (CEC) | cUPC |
| DIN 4109 | ISO 3822 | Ü-Zeichen | |



WATER POINTS Body spray FlowReduce - Dark Chrome

36 515 979

Certificates

LGA_18 IAPMO_4976 (

WATER POINTS Body spray FlowReduce - Dark Chrome

36 515 979

