

WATER POINTS Body spray FlowReduce - Dark Chrome

SERIES-VARIOUS

36 515 979



- HORIZONTAL RAIN, flow rate max. 1.6 gpm (at 3 bar)
- Function from: gpm
- Descaling system















Technical data:

- Cover plate 4-3/4" x 4-3/4"
- 1/2" connection

Notes:

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Additional flow restrictor (2.2 gpm) included to extend spray projection.**

Additional flow restrictor (2.2 gpm) included to extend spray projection.

	Dark Chrome	36 515 979-19
	Chrome	36 515 979-00
	Brushed Platinum	36 515 979-06
	Platinum	36 515 979-08
	Light gold	36 515 979-26
	Brushed Light Gold	36 515 979-27
	Brushed Durabronze (23kt Gold)	36 515 979-28
	Matte Black	36 515 979-33
	Brushed Dark Brass	36 515 979-39
	Brushed Bronze	36 515 979-42
	Brushed Champagne (22kt Gold)	36 515 979-46
	Champagne (22kt Gold)	36 515 979-47
	Brushed Chrome	36 515 979-93
	Brushed Dark Platinum	36 515 979-99

Required article



Rough -

- Min. rough in depth 3-3/8"
- Max. rough in depth 4-3/8"

35 205 970-90
0010

Recommended article



xGRID Mounting bracket for drywall construction -

12 340 970 90

Required article



xGRID Installation track 21.85" -

12 360 970 90

Required article




WATER POINTS Adapter plate -

- Adapter plate for mounting concealed rough parts 35 205 970 90 on the xGRID installation track.


12 305 970 90

36 515 979


mm [inches]

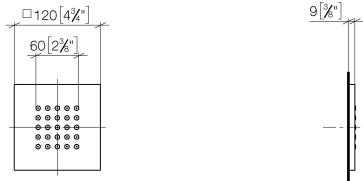

Flow rate chart

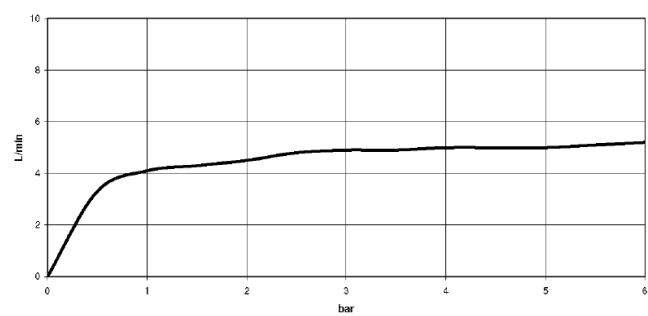

Trajectory length diagram

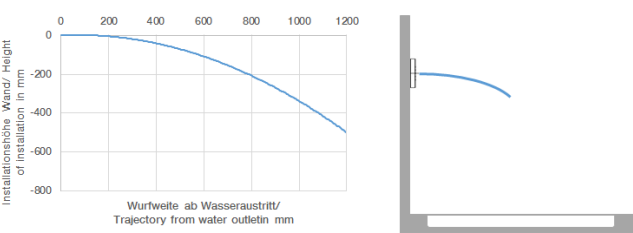

Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC	DIN 4109
ISO 3822	Ü-Zeichen		



WATER POINTS Body spray FlowReduce - Dark Chrome

SERIES-VARIOUS

36 515 979

Certificates and sustainability

LGA_18 IAPMO_4976 (

36 515 979

