

WATER POINTS Body spray FlowReduce - Light gold

36 515 979



- HORIZONTAL RAIN, flow rate max. 1.6 gpm (at 3 bar)
 - Descaling system
 - Cover plate 4-3/4" x 4-3/4"
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Additional flow restrictor (2.2 gpm) included to extend spray projection.**

Additional flow restrictor (2.2 gpm) included to extend spray projection.

	Light gold	36 515 979-26
	Chrome	36 515 979-00
	Brushed Platinum	36 515 979-06
	Platinum	36 515 979-08
	Dark Chrome	36 515 979-19
	Brushed Light Gold	36 515 979-27
	Brushed Durabronze (23kt Gold)	36 515 979-28
	Matte Black	36 515 979-33
	Brushed Bronze	36 515 979-42
	Brushed Champagne (22kt Gold)	36 515 979-46
	Champagne (22kt Gold)	36 515 979-47
	Brushed Chrome	36 515 979-93
	Brushed Dark Platinum	36 515 979-99

Required article

WATER POINTS Adapter plate - 12 305 970 90



Required article

Rough - 35 205 970-90
 •Min. rough in depth "
 •Max. rough in depth "



Recommended article

xGRID Mounting bracket for drywall construction - 12 340 970 90



Required article

xGRID Installation track 21.85" - 12 360 970 90



WATER POINTS Body spray FlowReduce - Light gold

36 515 979


mm [inches]



Flow rate chart



Trajectory length diagram

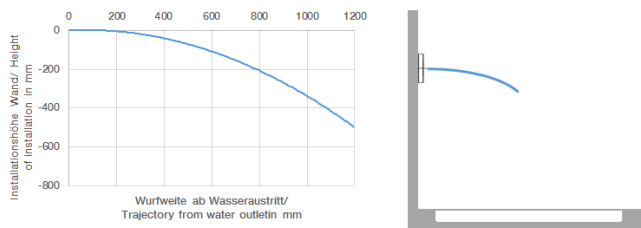

Codes & Standards

ASME
A112.18.1/CSA
B125.1

California Energy
Commission
(CEC)

DIN 4109

ISO 3822

Ü-Zeichen



WATER POINTS Body spray FlowReduce - Light gold

36 515 979

Certificates

LGA_18

WATER POINTS Body spray FlowReduce - Light gold

36 515 979

