

WATER POINTS Body spray FlowReduce - Champagne (22kt Gold)

SERIES-VARIOUS

36 515 979 Product version from 4/1/2024



- HORIZONTAL RAIN, flow rate max. 1.6 gpm (at 3 bar)
- Function from: gpm
- Descaling system














Technical data:

- Cover plate 4-3/4" x 4-3/4"
- 1/2" connection

Notes:

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Additional flow restrictor (2.2 gpm) included to extend spray projection.**

Additional flow restrictor (2.2 gpm) included to extend spray projection.

	Champagne (22kt Gold)	36 515 979-47
	Chrome	36 515 979-00
	Brushed Platinum	36 515 979-06
	Platinum	36 515 979-08
	Dark Chrome	36 515 979-19
	Light gold	36 515 979-26
	Brushed Light Gold	36 515 979-27
	Brushed Durabronze (23kt Gold)	36 515 979-28
	Matte Black	36 515 979-33
	Brushed Dark Brass	36 515 979-39
	Brushed Bronze	36 515 979-42
	Brushed Champagne (22kt Gold)	36 515 979-46
	Brushed Chrome	36 515 979-93
	Brushed Dark Platinum	36 515 979-99

Required article



Rough -

- Max. rough in depth 4-3/8"
- Min. rough in depth 3-3/8"

35 205 970-90
0010

Required article




xGRID Installation track 21.85" - 12 360 970 90

Recommended article




xGRID Mounting bracket for
drywall construction -


12 340 970 90

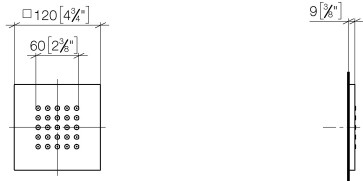

Flow rate chart

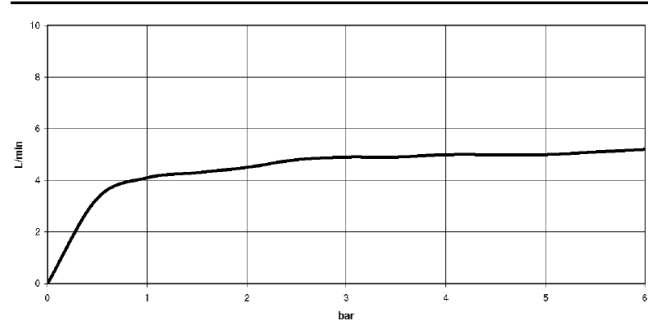

Trajectory length diagram

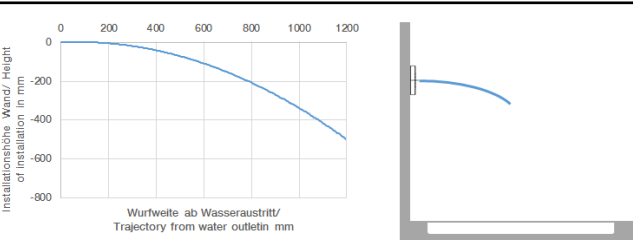

Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC	DIN 4109
ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen




WATER POINTS Body spray FlowReduce - Champagne (22kt Gold)

SERIES-VARIOUS

36 515 979 Product version from 4/1/2024

Certificates and sustainability

LGA_18 WRAS_1304 IAPMO_4976 (

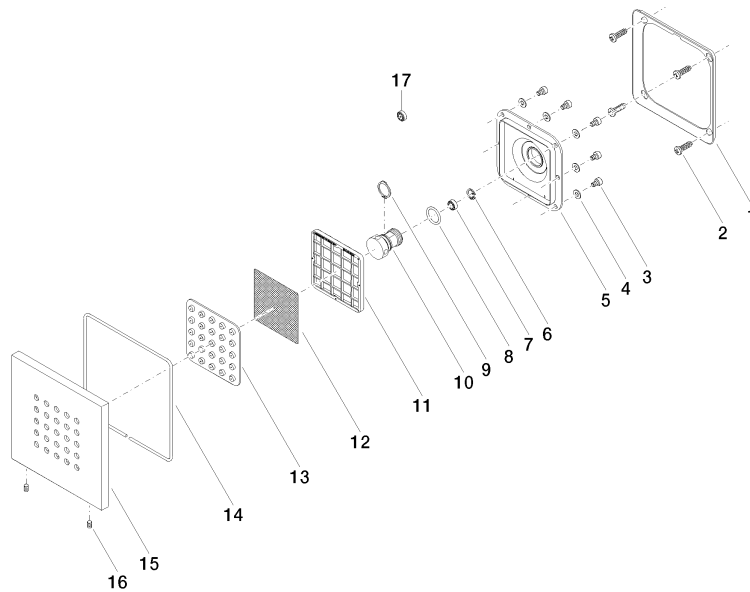

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
	14 09 14 03 117 90	seal	1.00	2
	15 09 27 98 004-47	rosette	1.00	30
	12 09 29 30 043 90	insert	1.00	2
	10 09 17 11 146 90	distributor	1.00	60
	16 09 31 11 048 90	pin	1.00	2
	13 09 12 01 075 90	insert	1.00	2
	1 09 28 01 024 90	holder	1.00	2
	6 09 16 01 016 90	ring	1.00	2
	11 09 17 97 057 90	holder	1.00	2
	7 90 23 01 032 00 90	flow reducer	1.00	2
	2 09 30 31 022 90	screw	4.00	2
	17 09 23 01 052 90	flow reducer	1.00	2
	4 09 30 11 024 90	disc	8.00	2
	3 09 30 30 031 90	screw	8.00	2
	9 09 16 01 017 90	ring	1.00	2
	5 09 12 12 205 90	base	1.00	2
	8 09 14 10 130 90	seal	1.00	2