


## WATER BAR Body spray FlowReduce - Brushed Light Gold

SERIES-VARIOUS














36 517 979 Product version from 5/16/2020



- HORIZONTAL RAIN, flow rate max. 1.6 gpm (at 3 bar)
- Function from: gpm
- Descaling system
- Cover plate 9-1/2" x 2-3/8"
- 1/2" connection

### Notes:

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Light Gold	36 517 979-27
	Chrome	36 517 979-00
	Brushed Platinum	36 517 979-06
	Platinum	36 517 979-08
	Dark Chrome	36 517 979-19
	Light gold	36 517 979-26
	Brushed Durabronze (23kt Gold)	36 517 979-28
	Matte Black	36 517 979-33
	Brushed Dark Brass	36 517 979-39
	Brushed Bronze	36 517 979-42
	Brushed Champagne (22kt Gold)	36 517 979-46
	Champagne (22kt Gold)	36 517 979-47
	Brushed Chrome	36 517 979-93
	Brushed Dark Platinum	36 517 979-99

### Required article



#### Rough -

- Min. rough in depth 3-7/8"
- Max. rough in depth 6-3/4"

35 206 970-90  
0010

### Recommended article




#### xGRID Mounting bracket for drywall construction -

12 340 970 90


### Required article




xGRID Installation track 21.85" - 12 360 970 90

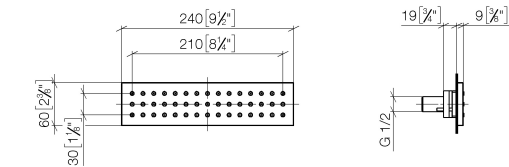

Flow rate chart

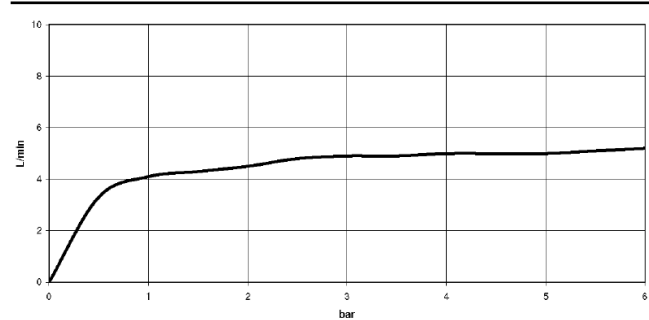

Trajectory length diagram

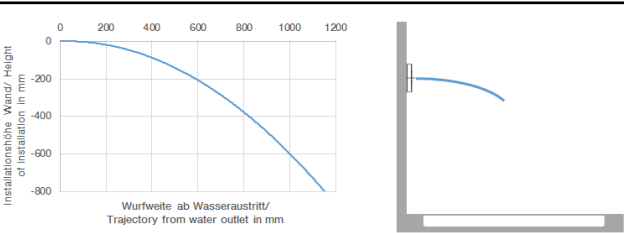

### Codes & Standards

California Energy Commission (CEC)	DIN 4109	ISO 3822	Ü-Zeichen
--	----------	----------	-----------



## WATER BAR Body spray FlowReduce - Brushed Light Gold

SERIES-VARIOUS

36 517 979 Product version from 5/16/2020

Certificates and sustainability

LGA\_19

