

## Single-lever tub mixer with stand pipe for freestanding installation with hand shower set - Dark Chrome

SERIES SPECIFIC

25 863 661



- Spout: Round aerated stream
- Water flow rate limited to max. 5.2 gpm
- Hand-held shower: COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
- Baton hand shower with descaling system
- Swiveling spout 360°
- 11-1/8" Projection
- Hand shower bracket
- Integrated diverter
- Total height 40-5/8" - 43-3/8"
- Lower body height 22-1/4" - 25"
- Height to aerator/spout outlet 35-3/8" - 38-1/8"
- Flanges Ø 5-3/8"
- Metal shower hose 49-1/4" with anti-twist device


NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)

Internal backflow preventer.


	Dark Chrome	25 863 661-19
	Chrome	25 863 661-00
	Brushed Platinum	25 863 661-06
	Light gold	25 863 661-26
	Brushed Light Gold	25 863 661-27
	Brushed Durabrass (23kt Gold)	25 863 661-28
	Matte Black	25 863 661-33
	Brushed Bronze	25 863 661-42
	Brushed Champagne (22kt Gold)	25 863 661-46
	Champagne (22kt Gold)	25 863 661-47
	Brushed Chrome	25 863 661-93
	Brushed Dark Platinum	25 863 661-99

# Single-lever tub mixer with stand pipe for freestanding installation with hand shower set - Dark Chrome

SERIES SPECIFIC

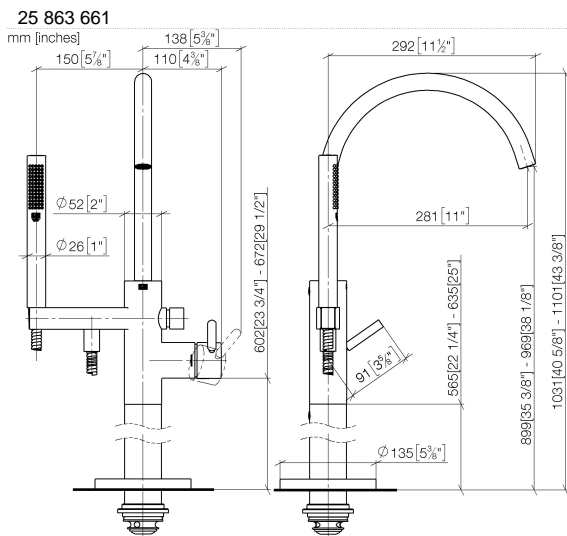

## Flow rate chart

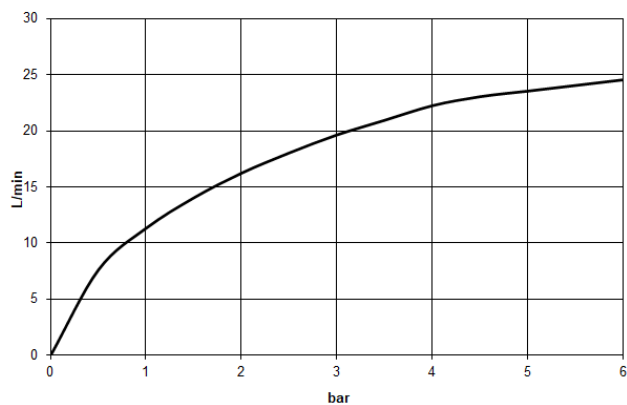

## Codes & Standards

ASME A112.18.1

California Energy  
Commission  
(CEC)

cUPC



Single-lever tub mixer with stand pipe for freestanding installation with hand shower set - Dark Chrome

SERIES SPECIFIC

25 863 661

Certificates and sustainability

IAPMO\_4976

# Single-lever tub mixer with stand pipe for freestanding installation with hand shower set - Dark Chrome

SERIES SPECIFIC

25 863 661

Parts for other  
finishes can be found  
here: [Chrome](#)

