

IMO Three-hole single-lever tub mixer for deck-mounted tub installation - Brushed Dark Platinum

IMO








27 412 670



- 8-7/8" Projection
- Spout: Cascade
- Water flow rate limited to max. 5.1 gpm
- Hand-held shower: COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
- Hand shower set with anti-scale technology
- Integrated diverter
- Total height 4-3/8"
- Height to aerator/spout outlet 5-3/8"
- Spout hole diameter 1-1/4"
- Single-lever mixer hole diameter 1-3/8"
- Hole diameter for hand shower set 1-1/4"
- Flange for mixer 2-3/8" x 2-3/8"
- 2-3/8" x 2-3/8" flange for spout
- Hand shower set with flange 2-3/8" x 2-3/8"
- Metal shower hose 88-5/8" with anti-twist device

NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)

Internal backflow preventer.


	Brushed Dark Platinum	27 412 670-99
	Chrome	27 412 670-00
	Brushed Platinum	27 412 670-06
	Dark Chrome	27 412 670-19
	Brushed Light Gold	27 412 670-27
	Matte Black	27 412 670-33
	Brushed Chrome	27 412 670-93

IMO Three-hole single-lever tub mixer for deck-mounted tub installation - Brushed Dark Platinum


IMO

27 412 670

mm [inches]

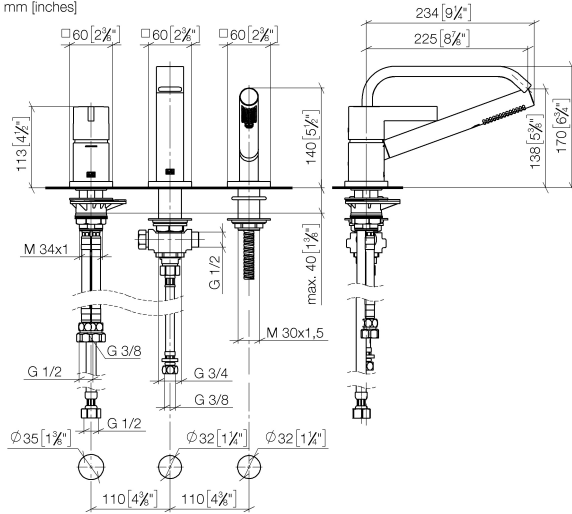

Flow rate chart

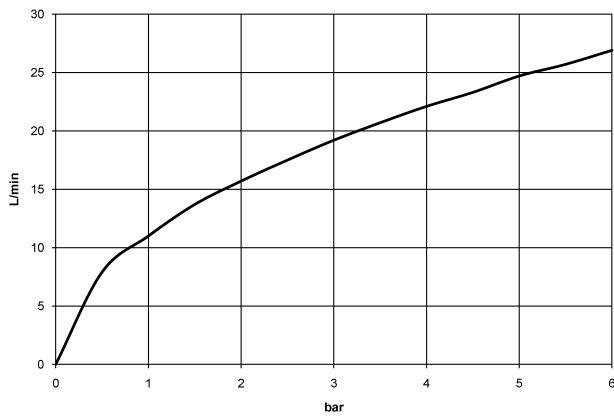

Codes & Standards

California Energy
Commission
(CEC)

EN 1717



IMO Three-hole single-lever tub mixer for deck-mounted tub installation - Brushed Dark Platinum

IMO

27 412 670

Certificates and sustainability

Belgaqua_24-008-2

IMO Three-hole single-lever tub mixer for deck-mounted tub installation - Brushed Dark Platinum

IMO

27 412 670

Parts for other
finishes can be found
here: [Chrome](#)

