

## MEM Three-hole single-lever tub mixer for deck-mounted tub installation - Dark Chrome

MEM

27 412 782



- 8-5/8" Projection
- Spout: Rectangular aerator
- Water flow rate limited to max. 5.4 gpm
- Hand-held shower: COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
- Hand shower set with anti-scale technology
- Integrated diverter
- Total height 11-3/4"
- Height to aerator/spout outlet 6-3/4"
- Spout hole diameter 1-1/4"
- Single-lever mixer hole diameter 1-3/8"
- Hole diameter for hand shower set 1-1/4"
- Flange for mixer 2-3/8" x 2-3/8"
- 2-3/8" x 2-3/8" flange for spout
- Hand shower set with flange 2-3/8" x 2-3/8"
- Metal shower hose 88-5/8" with anti-twist device

NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)


Internal backflow preventer.

	Dark Chrome	27 412 782-19
	Chrome	27 412 782-00
	Brushed Platinum	27 412 782-06
	Platinum	27 412 782-08
	Brushed Durabronze (23kt Gold)	27 412 782-28
	Brushed Champagne (22kt Gold)	27 412 782-46
	Champagne (22kt Gold)	27 412 782-47
	Brushed Dark Platinum	27 412 782-99

MEM Three-hole single-lever tub mixer for deck-mounted tub installation - Dark Chrome

MEM

27 412 782  
mm [inches]

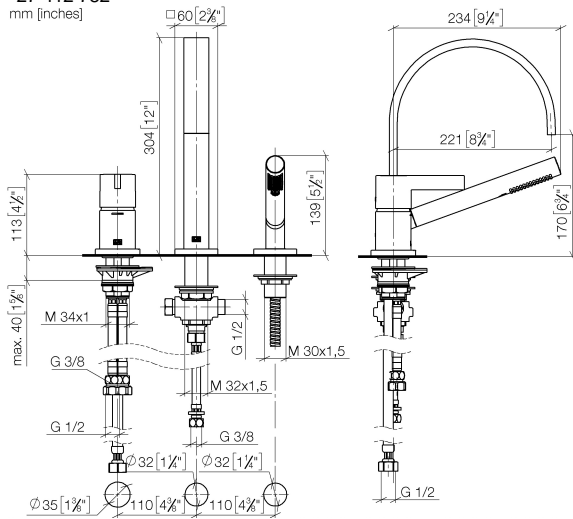

### Flow rate chart



## Codes & Standards

ASME A112.18.1

California Energy  
Commission  
(CEC)

cUPC

EN 1717



## MEM Three-hole single-lever tub mixer for deck-mounted tub installation - Dark Chrome

---

MEM

27 412 782

Certificates and sustainability

---

IAPMO\_4976

Belgaqua\_24-008-2

## MEM Three-hole single-lever tub mixer for deck-mounted tub installation - Dark Chrome

MEM

27 412 782

Parts for other  
finishes can be found  
here: [Chrome](#)

