

Hand shower set with integrated wall bracket FlowReduce - Brushed Dark Brass

SERIES SPECIFIC

27 802 660

Product version from 10/1/2023



- COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
 - Descaling system
 - 3/8" Shower outlet
 - Metal shower hose 49-1/4" with anti-twist device
 - Flange diameter 2-3/8"
 - 1/2" connection
 - This product reduces water consumption by 28% (compared to requirements of EPAct '92)
 - This product contributes to meeting the requirements of the LEED® Green Building Rating
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Internal backflow preventer.


	Brushed Dark Brass	27 802 660-39 0010
	Chrome	27 802 660-00 0010
	Brushed Platinum	27 802 660-06 0010
	Platinum	27 802 660-08 0010
	Dark Chrome	27 802 660-19 0010
	Light gold	27 802 660-26 0010
	Brushed Light Gold	27 802 660-27 0010
	Brushed Durabrass (23kt Gold)	27 802 660-28 0010
	Matte Black	27 802 660-33 0010
	Brushed Bronze	27 802 660-42 0010
	Brushed Champagne (22kt Gold)	27 802 660-46 0010
	Champagne (22kt Gold)	27 802 660-47 0010
	Brushed Chrome	27 802 660-93 0010
	Brushed Dark Platinum	27 802 660-99 0010



Hand shower set with integrated wall bracket FlowReduce - Brushed Dark Brass

SERIES SPECIFIC

27 802 660 Product version from 10/1/2023
mm [inches]

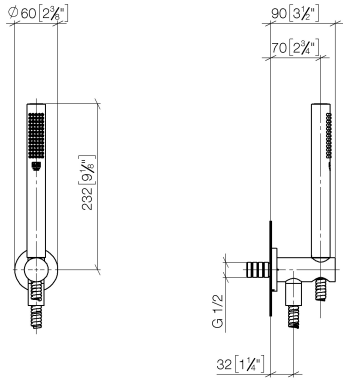

Codes & Standards

California Energy Commission (CEC)	DIN 4109	ISO 3822	Ü-Zeichen
------------------------------------	----------	----------	-----------

Certificates and sustainability


LGA_29

Hand shower set with integrated wall bracket FlowReduce - Brushed Dark Brass

SERIES SPECIFIC

27 802 660
Product version from 10/1/2023

Parts for other finishes can be found here: Chrome

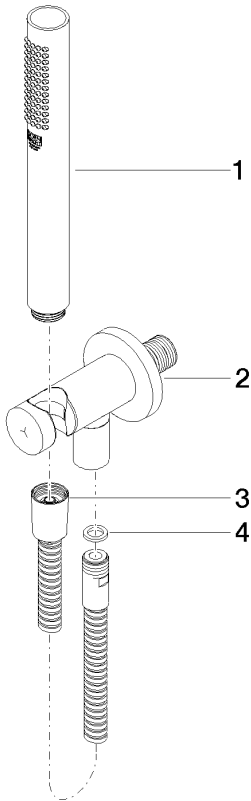

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
1	90 12 11 140 41-39	shower	1.00	30
3	90 30 02 072 00-39	hose	1.00	30
4	90 14 20 026 00 90	seal	1.00	2
2	28 490 660-39	Wall elbow with integrated wall bracket - Brushed Dark Brass	1.00	30