

TARA Hand shower set with individual flanges FlowReduce - Chrome

TARA

27 802 892 Product version from 4/1/2024



- COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
 - Descaling system
 - 1/2" Shower outlet
 - Wall elbow with flange Ø 2-1/8"
 - Wall bracket with flange Ø 2-1/8"
 - Metal shower hose 49-1/4" with anti-twist device
 - 1/2" wall elbow
 - This product reduces water consumption by 28% (compared to requirements of EPAct '92)
 - This product contributes to meeting the requirements of the LEED® Green Building Rating
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Internal backflow preventer.**

Internal backflow preventer.


	Chrome	27 802 892-00 0010
	Brushed Platinum	27 802 892-06 0010
	Platinum	27 802 892-08 0010
	Dark Chrome	27 802 892-19 0010
	Brushed Durabronze (23kt Gold)	27 802 892-28 0010
	Matte Black	27 802 892-33 0010
	Brushed Bronze	27 802 892-42 0010
	Brushed Champagne (22kt Gold)	27 802 892-46 0010
	Champagne (22kt Gold)	27 802 892-47 0010
	Brushed Chrome	27 802 892-93 0010
	Brushed Dark Platinum	27 802 892-99 0010

Required article

Rough-in adapter -

35 080 970-90
0010



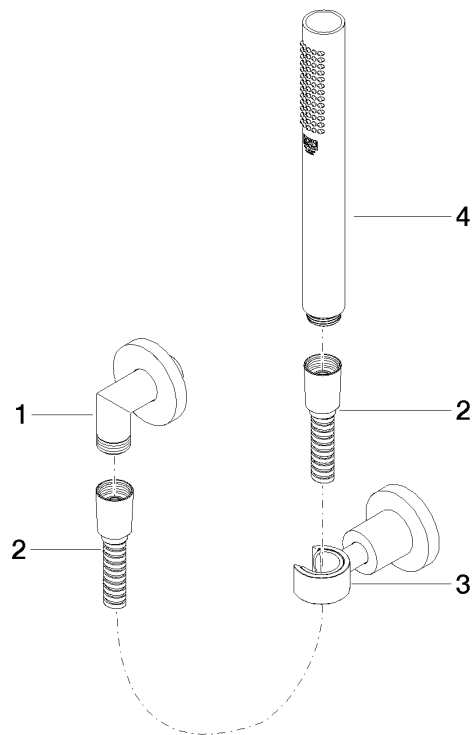

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
2	28 104 970-00	Metal shower hose 1/2" x 1/2" x 49-1/4" - Chrome	1.00	2
1	28 450 892-00	connection	1.00	60
3	28 050 892-00	TARA Wall bracket - Chrome	1.00	10
4	90 12 11 140 41-00	shower	1.00	10