



Hand shower FlowReduce - Matte White

28 017 979 Product version from 10/1/2023



- COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
- Descaling system
- Ø 5-1/8
- 1/2" connection
- This product reduces water consumption by 28% (compared to requirements of EPAct '92)
- This product contributes to meeting the requirements of the LEED® Green Building Rating
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


Internal backflow preventer.




Hand shower FlowReduce - Matte White

28 017 979 Product version from 10/1/2023

mm [inches]

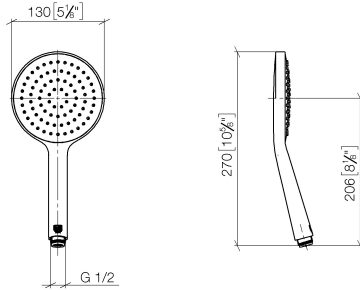

Flow rate chart

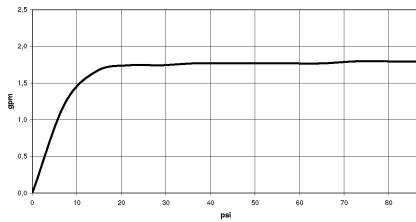

Codes & Standards

ASME A112.18.1	ASME A112.18.1/CSA B125.1	California Energy Commission (CEC)	cUPC
DIN 4109	EN 1112	ISO 3822	Ü-Zeichen



Hand shower FlowReduce - Matte White

28 017 979 Product version from 10/1/2023

Certificates


DVGW_DW-
6517DN0

LGA_29

IAPMO_4976 (

Hand shower FlowReduce - Matte White

28 017 979 Product version from 10/1/2023

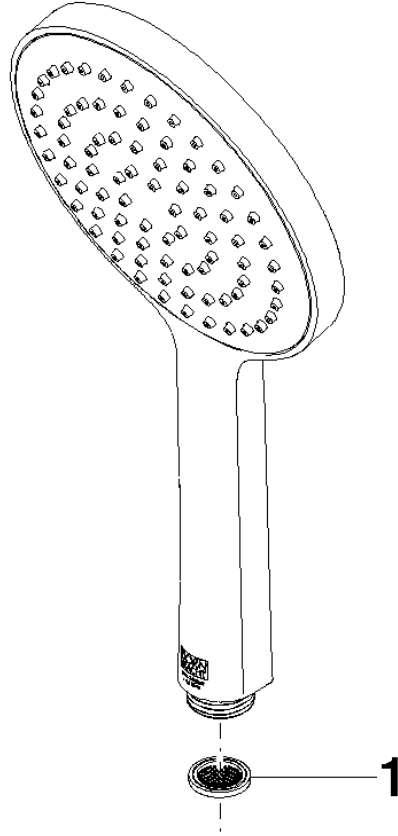

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
1	09 23 01 039 90	sieve	1	2