



TARA Two-way diverter for deck-mounted tub installation - Brushed Bronze

TARA

29 140 892    Product version from 6/30/2015



- Integrated diverter
  - 1-1/4" hole diameter
  - Flange diameter 2-1/8"
  - 1/2" connection
  - Water flow rate limited to max. 17.1 gpm
- (ADA)


	Brushed Bronze	29 140 892-42
	Chrome	29 140 892-00
	Brushed Platinum	29 140 892-06
	Platinum	29 140 892-08
	Dark Chrome	29 140 892-19
	Brushed Durabrass (23kt Gold)	29 140 892-28
	Matte Black	29 140 892-33
	Brushed Dark Brass	29 140 892-39
	Brushed Champagne (22kt Gold)	29 140 892-46
	Champagne (22kt Gold)	29 140 892-47
	Brushed Chrome	29 140 892-93
	Brushed Dark Platinum	29 140 892-99

29 140 892 Product version from 6/30/2015

mm [inches]



### Flow rate chart

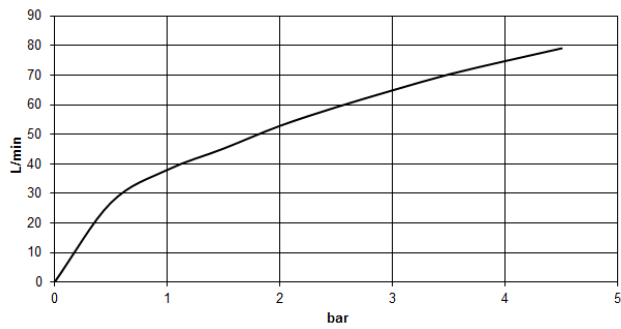

### Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC	DIN 4109
ISO 3822	Ü-Zeichen		



## TARA Two-way diverter for deck-mounted tub installation - Brushed Bronze

---

TARA

29 140 892 Product version from 6/30/2015

### Certificates and sustainability

---

LGA\_29

IAPMO\_4976

29 140 892 Product version from 6/30/2015

Parts for other  
finishes can be found  
here: [Chrome](#)

