



MADISON Concealed thermostat with two-way diverter - Brushed Durabronze (23kt Gold)

36 426 977 Product version from 6/30/2022



- Diverter with integrated volume control
- Cover plate Ø 6-7/8"
- Temperature control handle with safety lock at 100 °F/ 38°C
- Max. temperature can be set on the trim
- single flow function only

(ADA)

(ADA)

Required article



Concealed thermostat for one- and two-way outlets -

- Max. rough in depth "
- Min. rough in depth "

35 426 970-90
0010

Recommended article



xGRID Mounting bracket for drywall construction -

12 340 970 90

Required article




xGRID Installation track 21.85" - 12 360 970 90




MADISON Concealed thermostat with two-way diverter - Brushed Durabronze (23kt Gold)

36 426 977 Product version from 6/30/2022
mm [inches]

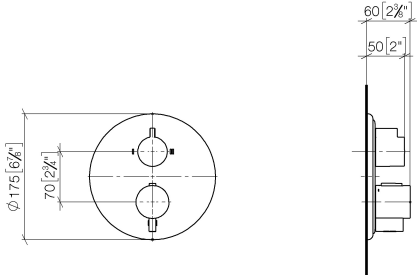

Flow rate chart

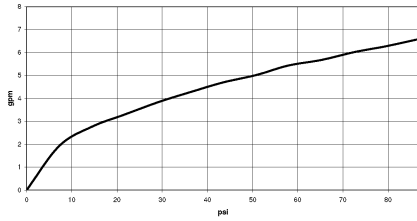

Codes & Standards

ADA


ASME
A112.18.1/CSA
B125.1

California Energy
Commission
(CEC)



MADISON Concealed thermostat with two-way diverter - Brushed Durabronze (23kt Gold)

36 426 977 Product version from 6/30/2022

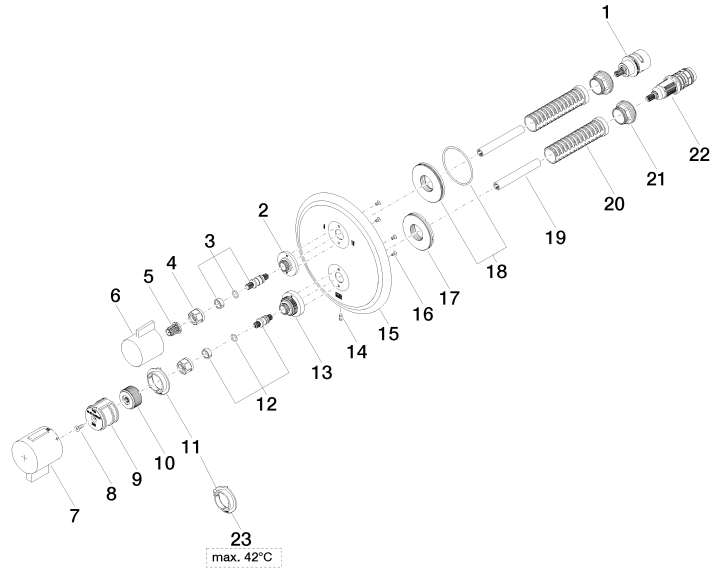



MADISON Concealed thermostat with two-way diverter - Brushed Durabross (23kt Gold)

36 426 977 Product version from 6/30/2022

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
1	90 90 03 163 00 90	diverter	1	2
2	09 12 12 053-28	base	1	20
3	04 29 06 111 01-00	spindle	1	10
4	90 23 30 023 00 90	nut	2	2
5	90 12 12 002 00 90	fixing cap	1	2
6	09 20 67 006-28	handle	1	20
7	90 17 33 019 00-28	handle	1	20
8	90 30 30 124 00 90	screw	1	2
9	90 12 12 052 00 90	base	1	2
10	09 12 12 054 90	base	1	2
11	09 28 10 190 90	regulator	1	2
12	04 29 06 024 01-00	spindle	1	10
13	09 12 12 051-28	base	1	20
14	09 31 11 134 90	pin	1	2
15	09 11 02 309-28	plate	1	20
16	09 30 30 157 90	screw	4	2
17	09 30 01 296 90	disc	1	2
18	90 30 01 190 00 90	disc	1	2
19	90 23 01 124 00 90	sleeve	2	2
20	90 18 40 077 01 90	spindle	2	2
21	09 24 04 257 90	nut	2	2
22	90 15 02 013 00 90	cartridge	1	2
23	09 28 10 189 90	regulator	1	2