

RAINMOON Rain panel With color light - Matte White

41 615 979



- Trim parts
- Rain panel with 2 different spray modes
- AQUACIRCLE RAIN: Circular rain curtain, flow rate max. 1.6 gpm (at 3 bar)
- TEMPEST RAIN: Natural rain, flow rate max. 1.3 gpm (at 3 bar)

Ceiling module power supply

- 12V DC (CV)

Spot lighting

- Color LED light RGBW
- Lights protected against splashing

Ambient lighting

- Color LED light RGBW
- Lights protected against splashing

Control

- ZigBee Light Link RGBW Controller
- To be provided by the customer: Zigbee Gateway

Environment

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Observe the regulations concerning protected zones specified in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.

To meet the North American plumbing standards, this application must be installed with a diverter (rough included).

Cover rain panel for adaptation to ceiling colour available in all RAL colours, price and delivery time on request

Required article



**RAINMOON Installation rough
With color light -** 35 615 970-90
0010


- Rough parts
- Pre-assembly kit for three-way diverter included
- Ceiling installation housing 1356 x 1356 x 290 mm
- Opening diameter 49-1/4"
- Min. rough in depth "



RAINMOON Rain panel With color light - Matte White


41 615 979

Flow rate chart

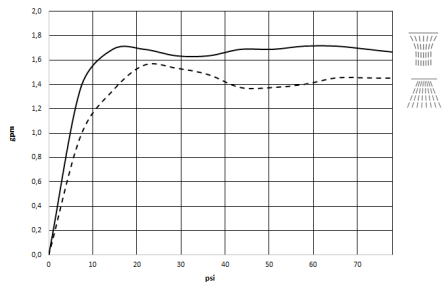

RAINMOON Rain panel With color light - Matte White

41 615 979

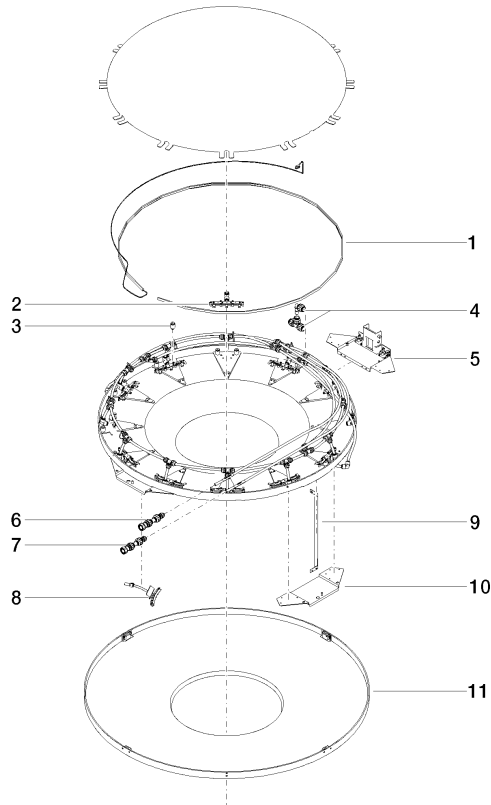

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
1	90 10 01 183 01 90	lamp	1	2
2	90 17 09 056 01 90	jet module	12	60
3	90 18 40 222 00 90	adaptor	24	2
4	90 24 04 321 00 90	threaded connector	1	2
5	90 17 20 211 00 90	joint	1	2
6	90 24 04 346 01 90	connection AQUACIRCLE	1	2
7	90 24 04 346 02 90	connection TEMPEST	1	2
8	90 17 09 057 01 90	jet module	12	2
9	90 17 20 217 00 90	holder	4	2
10	90 17 20 216 00 90	holder	3	2
11	90 11 02 325 00 90	cover	1	2