

13 800 809



- 190mm projection
 - fixed spout
 - circular, air-enriched flow
 - hole diameter 37 mm
 - rosette Ø 60 mm
 - 1/2" connection
 - plug-link mounting
 - max. flow 4.5 l/min
 - lead-free
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment**

For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment

	Chrome	13 800 809-00 0010
	Brushed Platinum	13 800 809-06 0010
	Platinum	13 800 809-08 0010
	Dark Chrome	13 800 809-19 0010
	Brushed Durabronze (23kt Gold)	13 800 809-28 0010
	Brushed Bronze	13 800 809-42 0010
	Brushed Champagne (22kt Gold)	13 800 809-46 0010
	Champagne (22kt Gold)	13 800 809-47 0010
	Brushed Dark Platinum	13 800 809-99 0010

Required miscellaneous


Concealed adapter -

35 080 970-90
0010




13 800 809

mm [inches]

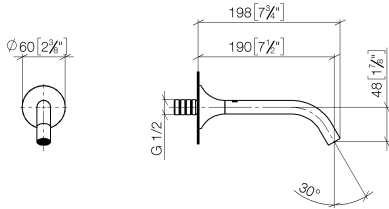

Flow rate chart

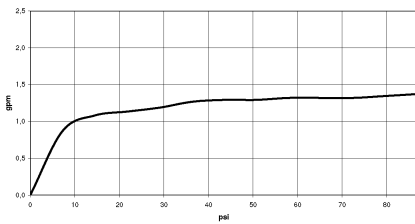

Codes & Standards

ASME
A112.18.1/CSA
B125.1

California Energy
Commission
(CEC)

NSF/ANSI 372

NSF/ANSI/CAN
61

Water Sense





VAIA Wall-mounted basin spout without pop-up waste - Chrome


VAIA

13 800 809

Certificates

IAPMO_N-4976. IAPMO_8834 (1). IAPMO_4976 (4). IAPMO_6397.

13 800 809

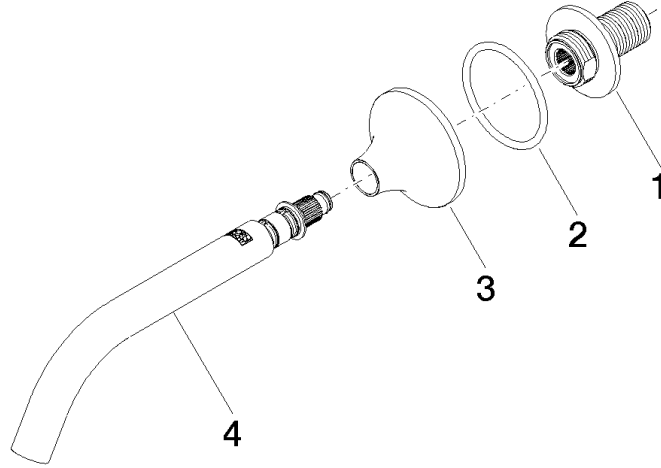

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 24 03 269 90	nipple	1	2
2	09 14 10 084 90	seal	1	2
3	09 27 80 011-00	rosette	1	10
4	90 28 22 310 01-00	spout	1	10