

25 100 892



- 240mm projection
- circular normal flow
- rotary diverter for bath/shower
- 3/8" shower outlet
- slide-on rosettes Ø 65 mm
- 1/2" connection
- gauge 150 mm - 15 mm
- max. flow 22 l/min at 3 bar flow pressure
- WRAS 2210004

Note: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 910 970 90) Intrinsic protection against back flow.


Stand pipes combination possible on request (x-TRA SERVICE).

Note: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 910 970 90)

Intrinsic protection against back flow.


Stand pipes combination possible on request (x-TRA SERVICE).

Required miscellaneous


	Concealed adapter - ● please order two adapters (USA only)	35 080 970-90 0010
---	--	-----------------------

25 100 892

mm [inches]

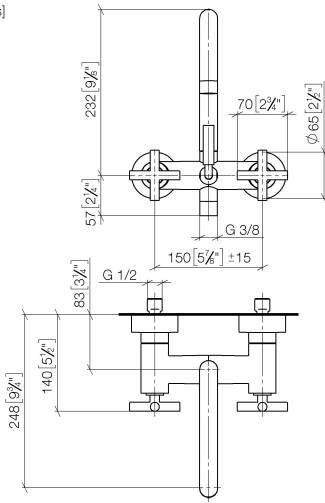

Flow rate chart

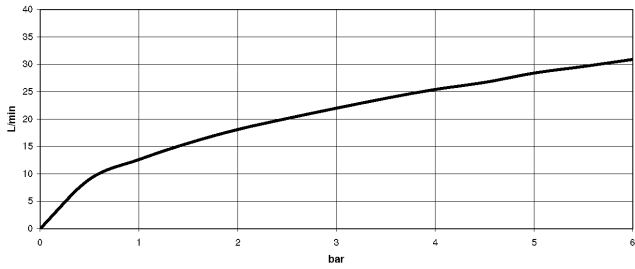

Codes & Standards

California Energy
Commission
(CEC)

DIN 4109

EN 1717

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



TARA Bath mixer for wall mounting - Brushed Durabron (23kt Gold)

TARA


25 100 892

Certificates

LGA_18

Belgaqua_21-026-2 WRAS_2210

25 100 892

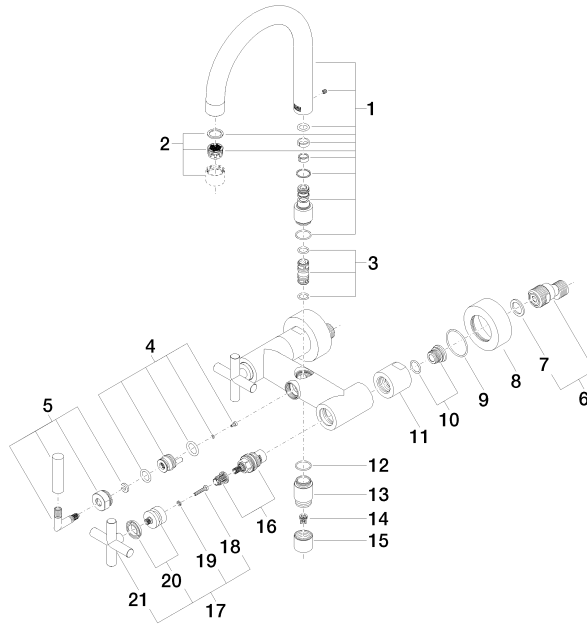



TARA Bath mixer for wall mounting - Brushed Durabron (23kt Gold)

TARA

25 100 892

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	90 28 22 219 00-28	spout	33	20