







27 802 845



- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
  - with anti-scale system
  - 3/8" shower outlet
  - rosette for wall elbow 60 x 78mm
  - rosette for shower holder 60 x 78mm
  - metal shower hose 1250mm with integrated anti-twist protection
  - 1/2" wall elbow
  - This product reduces water consumption by % (compared to requirements of EPAct '92)
  - This product can contribute to Water Use Reduction in LEED® Green Building Rating
  - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Intrinsic protection against back flow.**

	Chrome	27 802 845-00 0010
	Brushed Platinum	27 802 845-06 0010
	Dark Chrome	27 802 845-19 0010
	Matte Black	27 802 845-33 0010
	Brushed Chrome	27 802 845-93 0010
	Brushed Dark Platinum	27 802 845-99 0010

Intrinsic protection against back flow.

**Required miscellaneous**


**Concealed adapter -**

35 080 970-90  
0010




27 802 845

mm [inches]

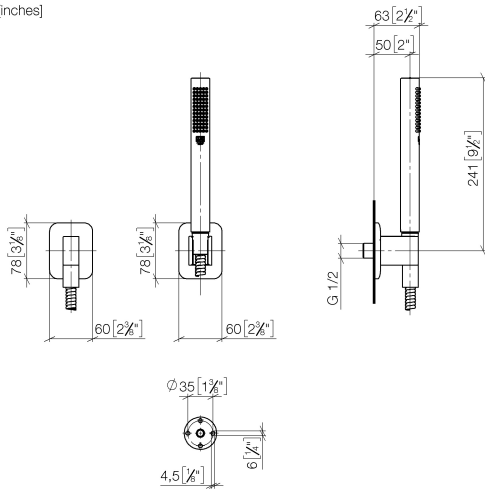

**Flow rate chart**

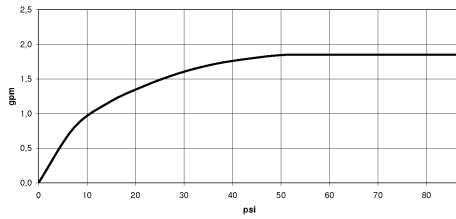

**Codes & Standards**

ASME  
A112.18.1/CSA  
B125.1

California Energy  
Commission  
(CEC)



LISSÉ Hand shower set with individual rosettes FlowReduce - Chrome

---

LISSÉ

27 802 845


Certificates

---

LGA\_29985.

IAPMO\_4976 (1).

27 802 845

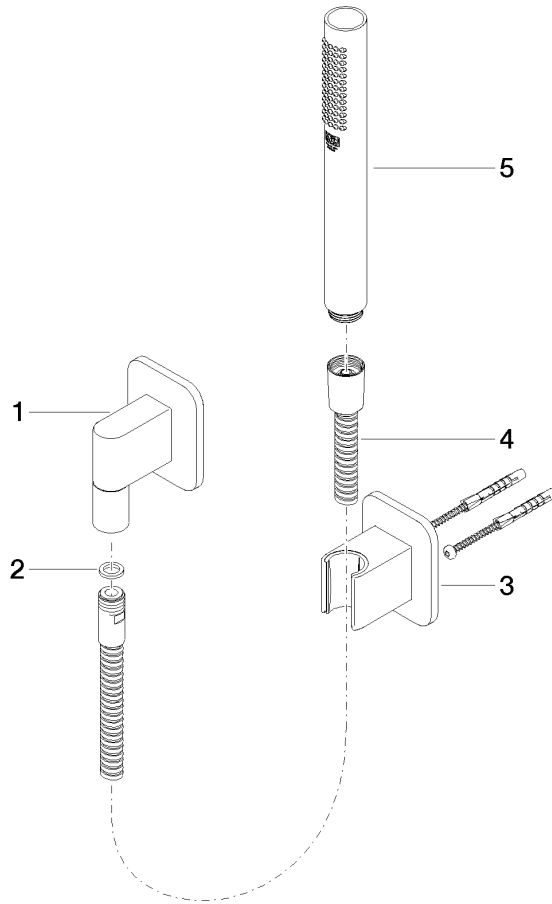

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 450 845-00	LISSÉ Wall elbow - Chrome	1	10
2	90 14 20 026 00 90	seal	1	2
3	28 050 845-00	LISSÉ Wall bracket - Chrome	1	10
4	90 30 02 072 00-00	Metal shower hose 1/2" x 3/8" x 1250 mm - Chrome	1	10
5	90 12 11 140 30-00	shower	1	10