

## Rain shower for surface-mounted ceiling installation 300 mm - Light Gold

28 031 970



Fits: TARA, LISSÉ, VAIA, META

• rain shower Ø 300 mm

- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
  PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- FORIFT RAIN, max. now rate o i/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously. Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.

Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included

Light Gold	28 031 970-26 0010
Chrome	28 031 970-00 0010
Brushed Platinum	28 031 970-06 0010
Platinum	28 031 970-08 0010
Dark Chrome	28 031 970-19 0010
Brushed Light Gold	28 031 970-27 0010
Brushed Durabrass (23kt Gold)	28 031 970-28 0010
Matte Black	28 031 970-33 0010
Brushed Bronze	28 031 970-42 0010
Brushed Champagne (22kt Gold)	28 031 970-46 0010
Champagne (22kt Gold)	28 031 970-47 0010
Brushed Chrome	28 031 970-93 0010
Brushed Dark Platinum	28 031 970-99 0010

#### Required miscellaneous



Concealed ceiling installation box35 041 970-90for surface-mounted ceiling0010installation -0010•min. recess depth 90 mmPre-assembly kit for three-waydiverter includedemax. recess depth 115 mm


TARA




### Rain shower for surface-mounted ceiling installation 300 mm - Light Gold


28 031 970

mm [inches]





### Flow rate chart




### Codes & Standards

California Energy Commission (CEC)



# Rain shower for surface-mounted ceiling installation 300 mm - Light Gold

28 031 970

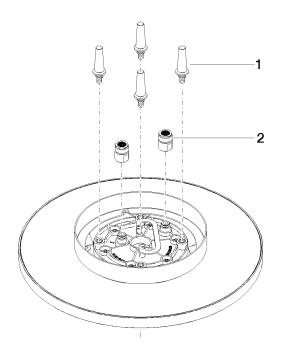

# Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2