DORN BRACHT

Rain shower for surface-mounted ceiling installation 300 mm - Brushed Light Gold

28 031 970

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.
Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.

Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included

Fits: TARA, LISSÉ, VAIA, META

Color	Article number
Brushed Light Gold	28 031 970-27 0010
Chrome	28 031 970-00 0010
Brushed Platinum	28 031 970-06 0010
Platinum	28 031 970-08 0010
Dark Chrome	28 031 970-19 0010
Light Gold	28 031 970-26 0010
Brushed Durabrass (23kt Gold)	28 031 970-28 0010
Matte Black	28 031 970-33 0010
Brushed Bronze	28 031 970-42 0010
Brushed Champagne (22kt Gold)	28 031 970-46 0010
Champagne (22kt Gold)	28 031 970-47 0010
Brushed Chrome	28 031 970-93 0010
Brushed Dark Platinum	28 031 970-99 0010

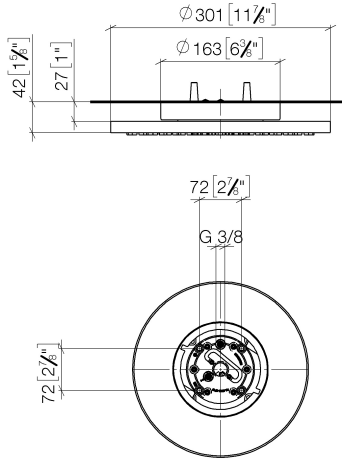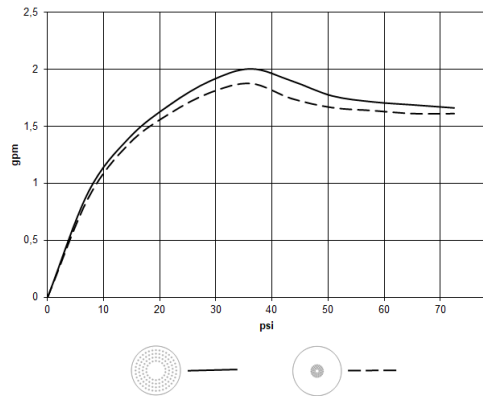## Required miscellaneous

Concealed ceiling installation box for surface-mounted ceiling installation -
- min. recess depth 90 mm
- Pre-assembly kit for three-way diverter included
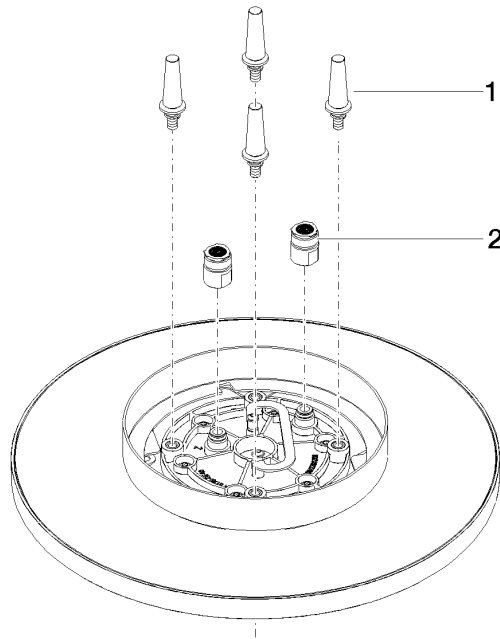- max. recess depth 115 mm

35 041 970-90 0010

Rain shower for surface-mounted ceiling installation 300 mm - Brushed Light Gold

28 031 970
mm [inches]

Flow rate chart

Codes & Standards

California Energy
Commission
(CEC)

Rain shower for surface-mounted ceiling installation 300 mm - Brushed Light Gold

TARA

28 031 970

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2