

### Rain shower for surface-mounted ceiling installation 300 mm - Brushed Bronze

28 031 970



Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.

Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.

Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included



#### Required miscellaneous



Concealed ceiling installation box 35 041 970-90 for surface-mounted ceiling 0010 installation -


- •min. recess depth 90 mm
- •Pre-assembly kit for three-way
- diverter included
- •max. recess depth 115 mm




### Rain shower for surface-mounted ceiling installation 300 mm - Brushed Bronze

28 031 970

mm [inches]



### Flow rate chart




### Codes & Standards

California Energy Commission (CEC)



# Rain shower for surface-mounted ceiling installation 300 mm - Brushed Bronze

28 031 970

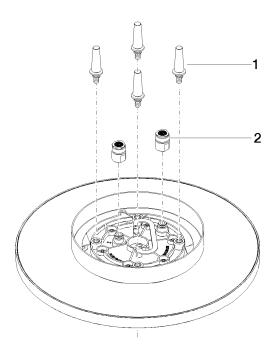

# Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2