

28 033 970



Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system
- min. recess depth 137 mm
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Not suitable for use in a steam room.

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.

Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.

Three-way diverter trim is sold separately

35 033 970-90

Pre-assembly kit for three-way diverter included

	Chrome		28 033 970-00 0010	
	Brushed Platinum		28 033 970-06 0010	
	Platinum	l	28 033 970-08 0010	
t	Dark Chi	rome	28 033 970-19 0010	
	Light Go	ld	28 033 970-26 0010	
ı	Brushed Light Gold		28 033 970-27 0010	
	Brushed (23kt Go	Durabrass ld)	28 033 970-28 0010	
	Matte Bla	ack	28 033 970-33 0010	
	Brushed	Bronze	28 033 970-42 0010	
	Brushed Champa Gold)	gne (22kt	28 033 970-46 0010	
	Champa Gold)	gne (22kt	28 033 970-47 0010	
	Brushed	Chrome	28 033 970-93 0010	
	Brushed Platinum		28 033 970-99 0010	

Required miscellaneous




Concealed ceiling installation box for recessed ceiling installation -


- •recess depth 137mm
- Pre-assembly kit for three-way diverter included




28 033 970

mm [inches]





Flow rate chart



Codes & Standards

California Energy Commission (CEC) Water Sense





TARA


28 033 970

Certificates

IAPMO_11777. IAPMO_4976 (7).



28 033 970

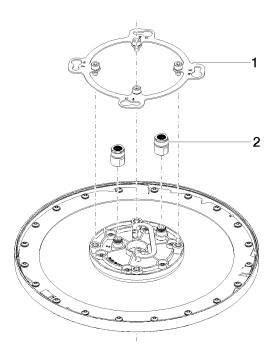

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 262 00 90	flange	1	2
2	90 24 03 309 02 90	connection	1	2