

Rain shower for recessed ceiling installation 300 mm - Brushed Champagne (22kt Gold)

28 033 970

28 033 970			
	 rain shower Ø 300 mm PURE RAIN, max. flow rate 6.8 l/min (at 3 bar) PURIFY RAIN, max. flow rate 6 l/min (at 3 bar) with anti-scale system min. recess depth 137 mm This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB Not suitable for use in a steam room. 	Brushed Champagne (22kt Gold)	28 033 970-46 0010
		Chrome	28 033 970-00 0010
		Brushed Platinum	28 033 970-06 0010
Fits: TARA, LISSÉ, VAIA, META	Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously. Three-way diverter trim is sold separately	Platinum	28 033 970-08 0010
		Dark Chrome	28 033 970-19 0010
	Pre-assembly kit for three-way diverter included	Light Gold	28 033 970-26 0010
	Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions	Brushed Light Gold	28 033 970-27 0010
	simultaneously. Three-way diverter trim is sold separately Pre-assembly kit for three-way diverter included	Brushed Durabrass (23kt Gold)	28 033 970-28 0010
		Matte Black	28 033 970-33 0010
		Brushed Bronze	28 033 970-42 0010

Champagne (22kt

Brushed Chrome

Brushed Dark

Platinum

Gold)

Required miscellaneous



Concealed ceiling installation box
for recessed ceiling installation -
•recess depth 137mm
•Pre-assembly kit for three-way
diverter included35 033 970-90
0010


28 033 970-47 0010


28 033 970-93 0010

28 033 970-99 0010




28 033 970 mm [inches]





Flow rate chart




Codes & Standards

California Energy Commission (CEC)



28 033 970

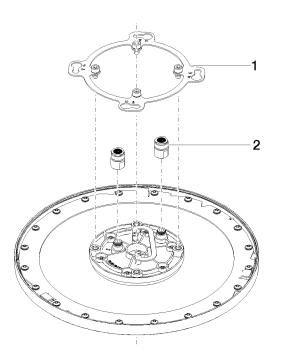

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 262 00 90	flange	1	2
2	90 24 03 309 02 90	connection	1	2