

#### 28 034 970



Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar) • PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- min. recess depth 137 mm
- with anti-scale system
- central RGBW LED spot
- RGBW LED ambient lighting
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
  Provided by customer: Zigbee gateway
- Not suitable for use in a steam room.
- Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included includes light bulbs with a Class G energy efficiency

Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included

includes light bulbs with a Class G energy efficiency

Matte White	28 034 970-10 0010
Chrome	28 034 970-00 0010
Brushed Platinum	28 034 970-06 0010
Platinum	28 034 970-08 0010
Dark Chrome	28 034 970-19 0010
Light Gold	28 034 970-26 0010
Brushed Light Gold	28 034 970-27 0010
Brushed Durabrass (23kt Gold)	28 034 970-28 0010
Matte Black	28 034 970-33 0010
Brushed Bronze	28 034 970-42 0010
Brushed Champagne (22kt Gold)	28 034 970-46 0010
Champagne (22kt Gold)	28 034 970-47 0010
Brushed Chrome	28 034 970-93 0010
Brushed Dark Platinum	28 034 970-99 0010


#### Required miscellaneous




35 034 970-90 Concealed ceiling installation box for recessed ceiling installation 0010 with light -•To be provided by the customer. Zigbee Gateway! •recess depth 137mm •Pre-assembly kit for three-way diverter included




28 034 970





#### Flow rate chart



### Codes & Standards

California Energy Commission (CEC) Water Sense




28 034 970

### Certificates

IAPMO\_11777. IAPMO\_4976 (7).



28 034 970

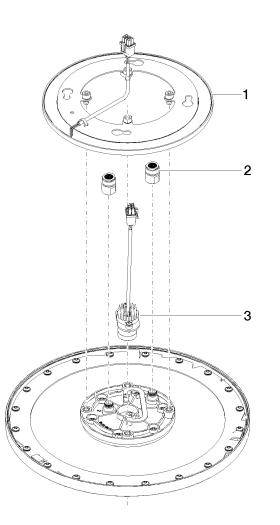

# Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 221 00 90	electronic accessories	1	2
2	90 24 03 309 02 90	connection	1	2
3	90 10 01 225 00 90	electronic accessories	1	2