


28 042 980	· · · · · · · · · · · · · · · · · · ·	Chrome	
	 rain shower 300 x 240mm PURE RAIN, max. flow rate 6.8 l/min (at 3 bar) 	Chrome	28 042 980-00 0010
	PURIFY RAIN, max. flow rate 6.0 //min (at 3 bar)		
	• Distance to ceiling from bottom edge of shower 40	Brushed Platinum	28 042 980-06 0010
	mm with anti-scale system 		
	central LED Spot 3000 K	Platinum	28 042 980-08 0010
	 Provided by customer: Light switch 		
	Not suitable for use in a steam room.	Dark Chrome	28 042 980-19 0010
	Three-way diverter trim is sold separately.		
Fits: IMO, LULU, MEM, CL.1, CYO	Pre-assembly kit for three-way diverter included	Brushed Light Gold	28 042 980-27 0010
	includes light bulbs with a Class F energy efficiency		
	•	Brushed Durabrass (23kt Gold)	28 042 980-28 0010
	Three-way diverter trim is sold separately.		
	Pre-assembly kit for three-way diverter included	Matte Black	28 042 980-33 0010
	includes light bulbs with a Class F energy efficiency		
		Brushed Champagne (22kt	28 042 980-46 0010
		Gold)	
		Champagne (22kt	28 042 980-47 0010
		Gold)	20 042 900-47 0010
		Brushed Chrome	28 042 980-93 0010
			20 042 300-33 0010
		Brushed Dark	28 042 980-99 0010
		Platinum	20 042 300-33 0010

Required miscellaneous




Concealed ceiling installation box
for surface-mounted ceiling
installation with light -
• max. recess depth 115 mm
• Provided by customer: Light switch
• min. recess depth 90 mm
• Pre-assembly kit for three-way
diverter included35 042 970-90
0010





Flow rate chart



Codes & Standards

California Energy Commission (CEC) Water Sense




28 042 980 Certificates

IAPMO_11777. IAPMO_4976 (7).



28 042 980

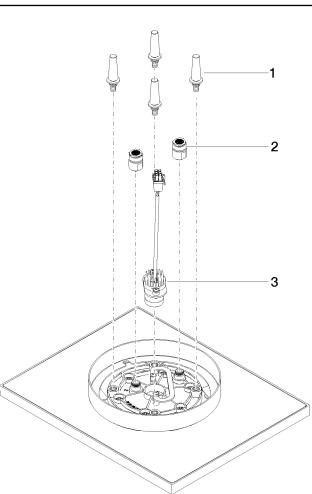

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2
3	90 10 01 225 00 90	electronic accessories	1	2