


28 042 980			
Fits: IMO, LULU, MEM, CL.1, CYO	 rain shower 300 x 240mm PURE RAIN, max. flow rate 6.8 l/min (at 3 bar) PURIFY RAIN, max. flow rate 6 l/min (at 3 bar) Distance to ceiling from bottom edge of shower 40 mm with anti-scale system central LED Spot 3000 K Provided by customer: Light switch Not suitable for use in a steam room. Three-way diverter trim is sold separately. Pre-assembly kit for three-way diverter included includes light bulbs with a Class F energy efficiency Three-way diverter trim is sold separately. 	Chrome	28 042 980-00 0010
		Brushed Platinum	28 042 980-06 0010
		Platinum	28 042 980-08 0010
		Dark Chrome	28 042 980-19 0010
		Brushed Light Gold	28 042 980-27 0010
		Brushed Durabrass (23kt Gold)	28 042 980-28 0010
		Matte Black	28 042 980-33 0010
	includes light builds with a class r energy eniciency	Brushed Champagne (22kt Gold)	28 042 980-46 0010
		Champagne (22kt Gold)	28 042 980-47 0010
		Brushed Chrome	28 042 980-93 0010
		Brushed Dark Platinum	28 042 980-99 0010

Required miscellaneous




Concealed ceiling installation box
for surface-mounted ceiling
installation with light -
• max. recess depth 115 mm
• Provided by customer: Light switch
• min. recess depth 90 mm
• Pre-assembly kit for three-way
diverter included35 042 970-90
0010





Flow rate chart



Codes & Standards

California Energy Commission (CEC) Water Sense

IMO




28 042 980 Certificates

IAPMO_11777. IAPMO_4976 (7).



28 042 980

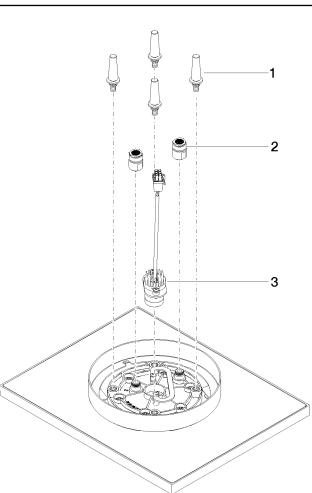

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2
3	90 10 01 225 00 90	electronic accessories	1	2