

### Rain shower for surface-mounted ceiling installation with light 300 x 240 mm -Brushed Durabrass (23kt Gold)

28 042 980 **研門** 

Fits: IMO, LULU, MEM, CL.1, CYO

- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40
- with anti-scale system

efficiency

- central LED Spot 3000 K
- Provided by customer: Light switch
- Not suitable for use in a steam room. Three-way diverter trim is sold separately. Pre-assembly kit for three-way diverter included includes light bulbs with a Class F energy

Three-way diverter trim is sold separately. Pre-assembly kit for three-way diverter included includes light bulbs with a Class F energy efficiency

Brushed Durabrass (23kt Gold)	28 042 980-28 0010
Chrome	28 042 980-00 0010
Brushed Platinum	28 042 980-06 0010
Platinum	28 042 980-08 0010
Dark Chrome	28 042 980-19 0010
Brushed Light Gold	28 042 980-27 0010
Matte Black	28 042 980-33 0010
Brushed Champagne (22kt Gold)	28 042 980-46 0010
Champagne (22kt Gold)	28 042 980-47 0010
Brushed Chrome	28 042 980-93 0010
Brushed Dark Platinum	28 042 980-99 0010

#### Required miscellaneous




Concealed ceiling installation box for surface-mounted ceiling installation with light -

35 042 970-90 0010


- •max. recess depth 115 mm
- Provided by customer: Light switchmin. recess depth 90 mm
- Pre-assembly kit for three-way
- diverter included



## Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - Brushed Durabrass (23kt Gold)



#### Flow rate chart



#### Codes & Standards


California Energy Commission (CEC)





# Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - Brushed Durabrass (23kt Gold)

28 042 980

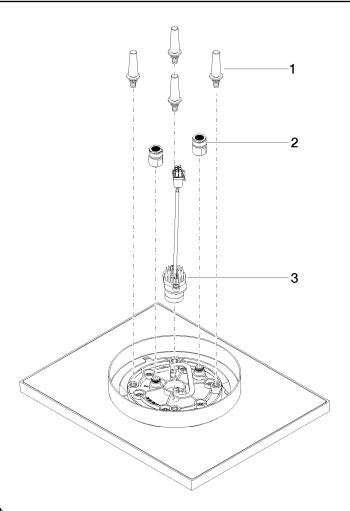

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2
3	90 10 01 225 00 90	electronic accessories	1	2