

Rain shower for surface-mounted ceiling installation with light 300 x 240 mm -Brushed Champagne (22kt Gold)

28 042 980	 rain shower 300 x 240mm PURE RAIN, max. flow rate 6.8 l/min (at 3 bar) PURIFY RAIN, max. flow rate 6 l/min (at 3 bar) Distance to ceiling from bottom edge of shower 40 mm with anti-scale system 	Brushed Champagne (22kt	28 042 980-46 0010
		Gold)	28 042 980-00 0010
	 central LED Spot 3000 K Provided by customer: Light switch 	Brushed Platinum	28 042 980-06 0010
	Not suitable for use in a steam room. Three-way diverter trim is sold separately.	Platinum	28 042 980-08 0010
Fits: IMO, LULU, MEM, CL.1, CYO	Pre-assembly kit for three-way diverter included includes light bulbs with a Class F energy efficiency	Dark Chrome	28 042 980-19 0010
	Three-way diverter trim is sold separately.	Brushed Light Gold	28 042 980-27 0010
	Pre-assembly kit for three-way diverter included includes light bulbs with a Class F energy efficiency	Brushed Durabrass (23kt Gold)	28 042 980-28 0010
		Matte Black	28 042 980-33 0010
		Champagne (22kt Gold)	28 042 980-47 0010
		Brushed Chrome	28 042 980-93 0010
		Brushed Dark	28 042 980-99 0010

Platinum


Required miscellaneous




Concealed ceiling installation box 35 042 970-90 for surface-mounted ceiling 0010 installation with light -•min. recess depth 90 mm •Pre-assembly kit for three-way diverter included •max. recess depth 115 mm •Provided by customer: Light switch



Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - Brushed Champagne (22kt Gold)



Flow rate chart




Codes & Standards

California Energy Commission (CEC)



Rain shower for surface-mounted ceiling installation with light 300 x 240 mm -Brushed Champagne (22kt Gold)

28 042 980

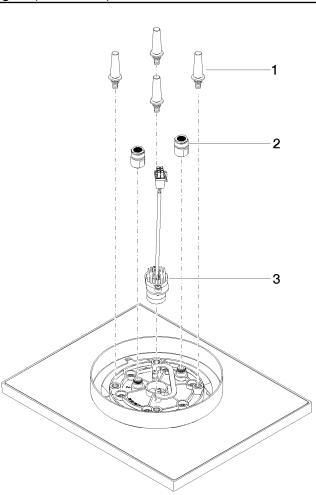

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2
3	90 10 01 225 00 90	electronic accessories	1	2