

Rain shower for recessed ceiling installation with light 300 x 240 mm -Champagne (22kt Gold)

28 044 980



Fits: IMO, LULU, MEM, CL.1, CYO

- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- min. recess depth 137 mm
- with anti-scale system
- central RGBW LED spot
- RGBW LED ambient lighting
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
 Not suitable for use in a steam room.

Three-way diverter trim is sold separately Pre-assembly kit for three-way diverter included includes light bulbs with a Class G energy efficiency

Three-way diverter trim is sold separately Pre-assembly kit for three-way diverter included includes light bulbs with a Class G energy efficiency

Champagne (22kt Gold)	28 044 980-47 0010
Chrome	28 044 980-00 0010
Brushed Platinum	28 044 980-06 0010
Platinum	28 044 980-08 0010
Dark Chrome	28 044 980-19 0010
Brushed Light Gold	28 044 980-27 0010
Brushed Durabrass (23kt Gold)	28 044 980-28 0010
Matte Black	28 044 980-33 0010
Brushed Champagne (22kt Gold)	28 044 980-46 0010
Brushed Chrome	28 044 980-93 0010
Brushed Dark Platinum	28 044 980-99 0010

Required miscellaneous




Concealed ceiling installation box for recessed ceiling installation with light -

35 044 970-90


- •recess depth 137mm
- •Pre-assembly kit for three-way diverter included
- •To be provided by the customer. Zigbee Gateway!



Rain shower for recessed ceiling installation with light 300 x 240 mm - Champagne (22kt Gold)



Flow rate chart



Codes & Standards

California Energy Commission (CEC) Water Sense





Rain shower for recessed ceiling installation with light 300 x 240 mm - Champagne (22kt Gold)

IMO

28 044 980 Certificates


IAPMO_11777. IAPMO_4976 (7).





Rain shower for recessed ceiling installation with light 300 x 240 mm - Champagne (22kt Gold)

28 044 980

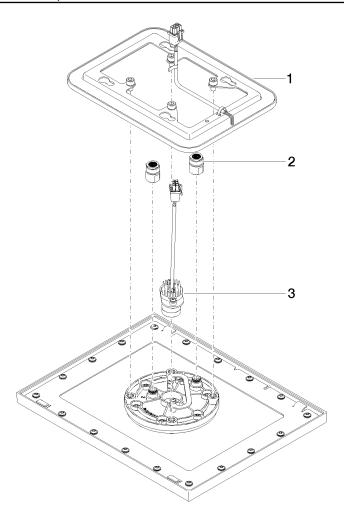

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 224 00 90	electronic accessories	1	2
2	90 24 03 309 02 90	connection	2	2
3	90 10 01 225 00 90	electronic accessories	1	2