

## Concealed wall mounting -

---

35 003 970



- red brass, lead-free
- 2x supply connection 1/2" female thread (cold/hot), DN 15
- dust cover
- anti-water packing
- soundproofing

for 36 804 661-FF

## Recommended miscellaneous

---

**Extension 25 mm -**


12 179 970 90



## Concealed wall mounting -


35 003 970

mm [inches]

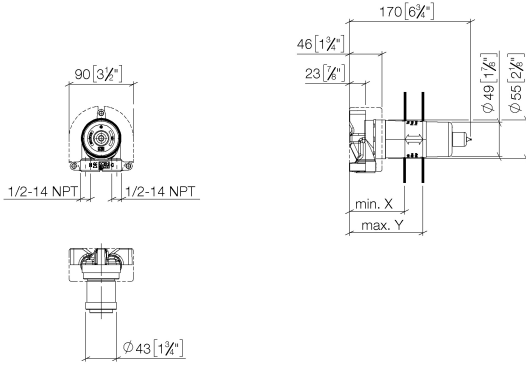

with item	min. X	max. Y
36013970-FF;36013660-FF;36045970-FF;36045660-FF	90 [3 1/2"]	113 [4 1/2"]
36804661-FF	78 [3 1/8"]	103 [4"]

## Flow rate chart

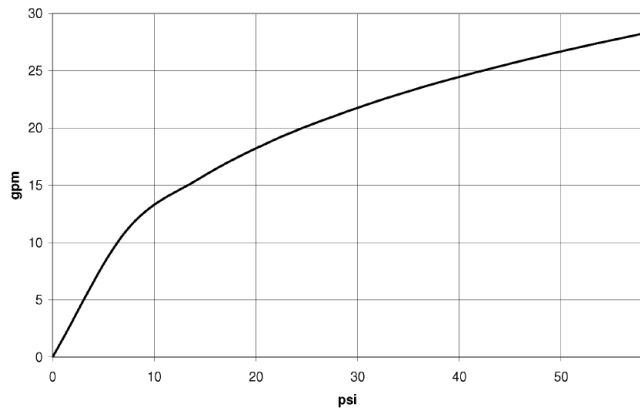

## Codes & Standards

ASME  
A112.18.1/CSA  
B125.1



## Concealed wall mounting -

---

35 003 970


### Certificates

---

IAPMO\_N-4976 (2). IAPMO\_4976 (3). IAPMO\_6397 (1).

**Concealed wall mounting -**

35 003 970

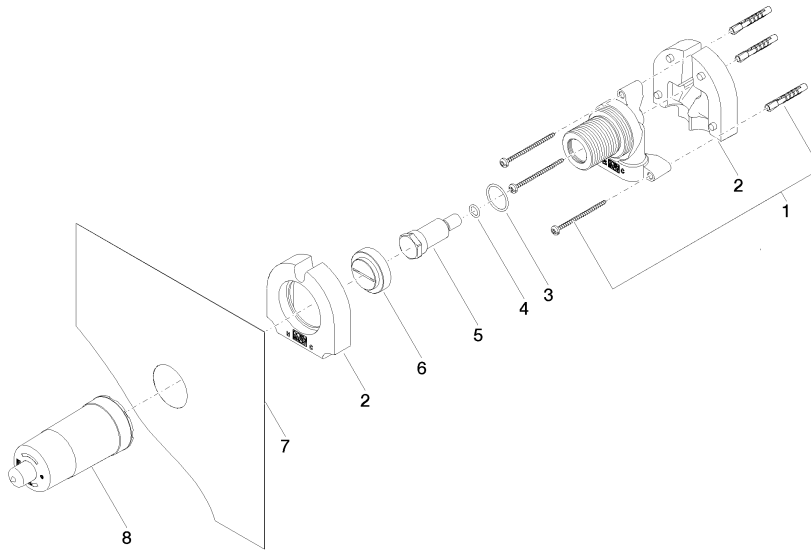

**Spare parts list**

No.	Item Number	Name	Quantity used	Delivery time
1	05 30 31 029 00 90	fixing set	1	2
2	09 11 11 019 90	accessories	2	2
3	09 14 10 112 90	seal	1	2
4	09 14 10 139 90	seal	1	2
5	09 31 20 038 90	plug	1	2
6	09 20 97 010 90	cap	1	2
7	04 14 03 079 00 90	gasket kit	1	2
8	09 21 02 178 90	cap	1	2