










CYO Wall-mounted basin spout without pop-up waste - Brushed Durabrass (23kt Gold)

CYO

13 800 811			
	<ul style="list-style-type: none"> • 160mm projection • fixed spout • rectangular, air-enriched flow • hole diameter 37 mm • 1/2" connection • max. flow 4.5 l/min • lead-free • This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB 	<div>  Brushed Durabrass (23kt Gold) </div> <div>  Chrome </div> <div>  Brushed Platinum </div> <div>  Dark Chrome </div> <div>  Platinum / Brushed Platinum </div> <div>  Durabrass / Brushed Durabrass (23kt Gold) </div> <div>  Brushed Dark Platinum </div>	<div>13 800 811-28</div> <div>13 800 811-00</div> <div>13 800 811-06</div> <div>13 800 811-19</div> <div>13 800 811-36</div> <div>13 800 811-38</div> <div>13 800 811-99</div>


Recommended miscellaneous

	Concealed wall elbow - •max. recess depth 163 mm •min. recess depth 90 mm	35 085 970 90
---	--	---------------

CYO Wall-mounted basin spout without pop-up waste - Brushed Durabross (23kt Gold)

CYO

13 800 811
mm [inches]

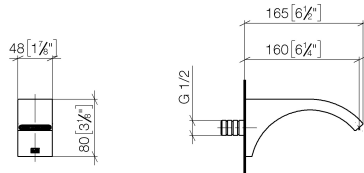

Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

NSF372

NSF61

Ü-Zeichen



CYO Wall-mounted basin spout without pop-up waste - Brushed Durabrass
(23kt Gold)

CYO


13 800 811

Certificates and sustainability

LGA_38

IAPMO_N-4

IAPMO_6

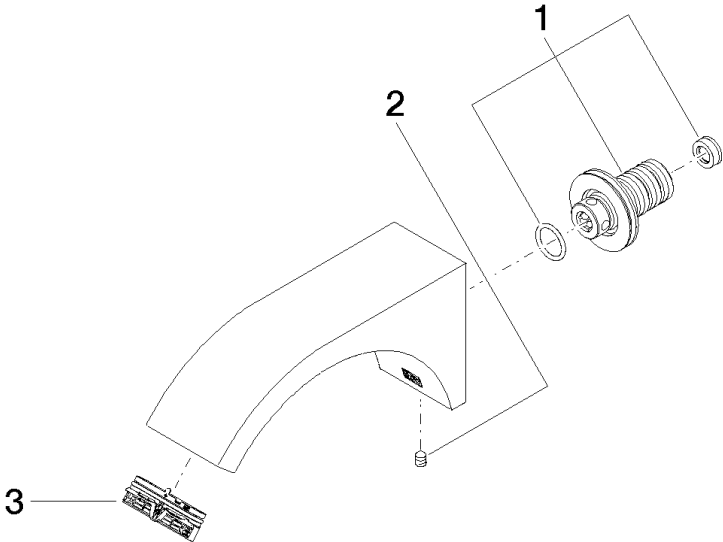

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 24 03 108 01 90	nipple set	1.00	2
3	90 29 03 121 00 90	aerator	1.00	2
2	90 31 11 004 00 90	pin	1.00	2