

Wall-mounted basin spout without pop-up waste - Dark Chrome

13 800 882



- 190mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 40 mm
- rosette Ø 60 mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS

For Touchfree control please order eSet Touchfree with temperature adjustment

	Dark Chrome	13 800 882-19
	Chrome	13 800 882-00
	Brushed Durabronze (23kt Gold)	13 800 882-28
	Brushed Bronze	13 800 882-42
	Brushed Champagne (22kt Gold)	13 800 882-46
	Champagne (22kt Gold)	13 800 882-47
	Brushed Chrome	13 800 882-93
	Brushed Dark Platinum	13 800 882-99

Recommended miscellaneous




- Concealed wall elbow -**
- max. recess depth mm
 - min. recess depth mm

35 085 970 90


Wall-mounted basin spout without pop-up waste - Dark Chrome

13 800 882

mm [inches]

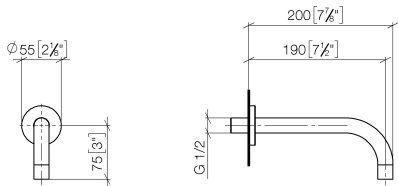

Flow rate chart

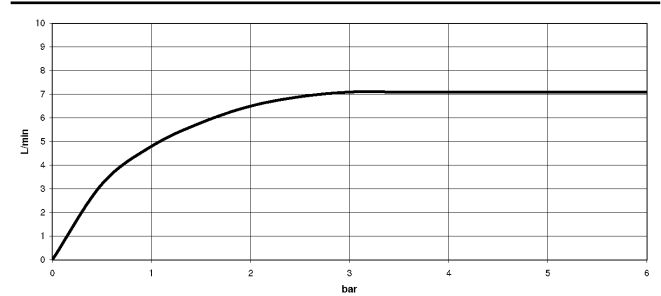

Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations
----------	----------	------------------------	-----------------------------

Ü-Zeichen



Wall-mounted basin spout without pop-up waste - Dark Chrome

13 800 882

Certificates

LGA_29

WRAS_240602

Wall-mounted basin spout without pop-up waste - Dark Chrome

13 800 882

