

Wall-mounted basin spout without pop-up waste - Brushed Light Gold

SERIES SPECIFIC

13 800 882




- 190mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 40 mm
- rosette Ø 60 mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS

For Touchfree control please order eSet Touchfree with temperature adjustment


| | | |
|---|--------------------------------|---------------|
|  | Brushed Light Gold | 13 800 882-27 |
|  | Chrome | 13 800 882-00 |
|  | Dark Chrome | 13 800 882-19 |
|  | Brushed Durabronze (23kt Gold) | 13 800 882-28 |
|  | Brushed Bronze | 13 800 882-42 |
|  | Brushed Champagne (22kt Gold) | 13 800 882-46 |
|  | Champagne (22kt Gold) | 13 800 882-47 |
|  | Brushed Chrome | 13 800 882-93 |
|  | Brushed Dark Platinum | 13 800 882-99 |

13 800 882

mm [inches]

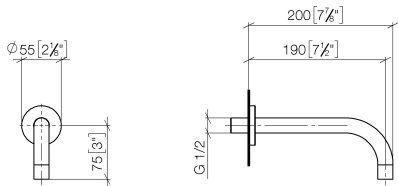

Flow rate chart

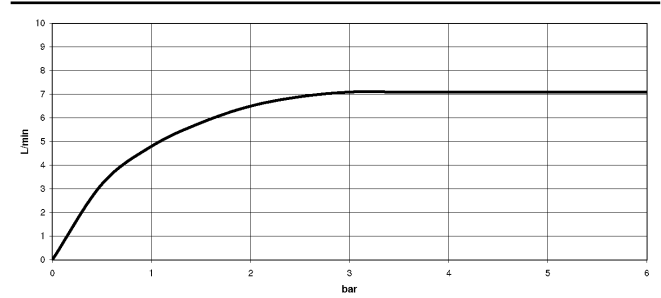

| Codes & Standards | | | |
|-------------------|----------|------------------------|-----------------------------|
| DIN 4109 | ISO 3822 | Scottish Water Byelaws | UK Water Supply Regulations |

Ü-Zeichen



Wall-mounted basin spout without pop-up waste - Brushed Light Gold

SERIES SPECIFIC

13 800 882

Certificates and sustainability

LGA_29

WRAS_240602

13 800 882

Parts for other
finishes can be found
here: [Chrome](#)

